


AFTER 8

Linear LED Pendant

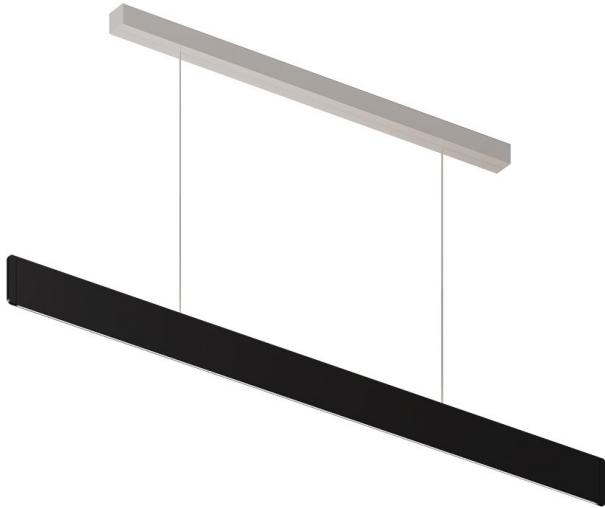

FEATURES

- Slim aluminum body, 1/4" profile
- Continuous LED up and down
- Anodized black, champagne and slate
- Power through suspension
- Diffused lens for homogenous light

ELECTRICAL/CONTROLS

- 48" - 42W, 2000lm
- 60" - 52W, 2300lm
- 120-277V, 50-60 Hz input
- 0-10V dimming to 1% with dim to off

LISTING

- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

LED INFO

- Luminus MP1616-1103: 90 CRI: 3-Step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 50,000 hrs

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	AFT8	After 8 Linear Pendant
TYPE	L1	48" - 42W, 2000lm
	L2	60" - 52W, 2300lm
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
CRI	90	90 CRI
FINISH	BK	black
	CG	champagne
	SL	slate
DIMMING	UNV-DIM10	120V-277V integrated driver, flicker free 0-10V dimming to 1%

Follow the steps to specify your fixture, example:

AFT8 - L1 - 30K - 90 - BK - UNV - DIM10

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PRODUCT DIMENSIONS

