


JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## BINA Pendant Round Tunable White

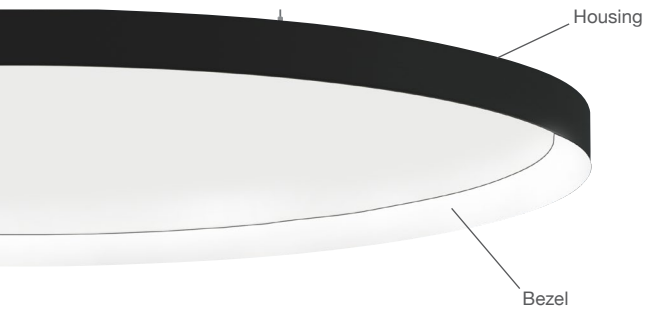

**DESCRIPTION**  
 Slim, 1.5" aluminum luminaire in 16", 24", 36" and 40" diameter. BINA is 0-10V or DALI dimmable to 1% using EldoLED® dual driver with static white and tunable white with a range of 2700K to 6500K.

**HOUSING**  
 - Housing is offered with three finishes with three bezel colors of black, white and matte chrome.

**MOUNTING**  
 - Canopy offered with three finishes of black, white and matte chrome. Aircraft cables supplied add support to the fixtures and, along with the power cable, come standard at 118" and can be field-cut.

**ELECTRICAL/CONTROLS**  
 - 120-277Vac, 50/60Hz input  
 - 0-10V Dimming to 0.1%

**LISTING**  
 - IP20 rating  
 - ETLus Listed to UL1598 (suitable for indoor use and dry locations only)  
 - cETL Listed to CSA C22.2 #250.0


DIRECT	4000K	INDIRECT	4000K
16"	2880 lm	16"/24"	1210 lm
24"	3330 lm	32"/40"	2755 lm
32"	5560 lm		
40"	7360 lm		

**LED INFO**  
 - Luminus MP Series LED:  
 CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 50,000 hrs


ORDERING CODE		
SERIES	BINA-P	bina pendant
TYPE	RD	round
LED	TW	tunable white (Luminus)
CCT	2765	2700K to 6500K tunable white
SIZE	16 24 32 40	D 16" D 24" D 32" D 40"
DIRECT/INDIRECT	D DI	direct only direct/indirect
HOUSING	BK WH MC	black white matte chrome
BEZEL COLOR	BK WH MC	black white matte chrome
CANOPY COLOR	BK MC WH	black matte chrome white

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**BINA-P - RD - TW - 2765 - 24 - DI - BK - WH - MC**

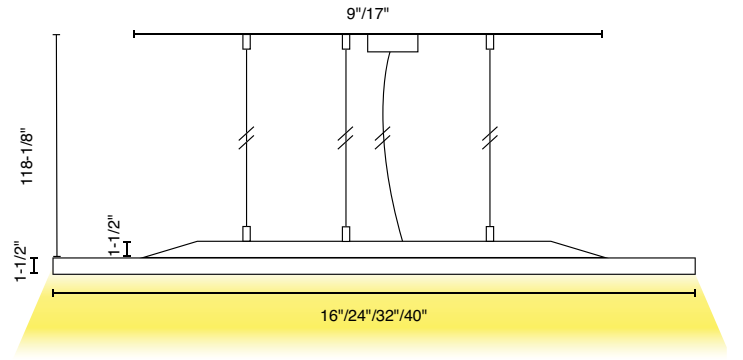

Direct

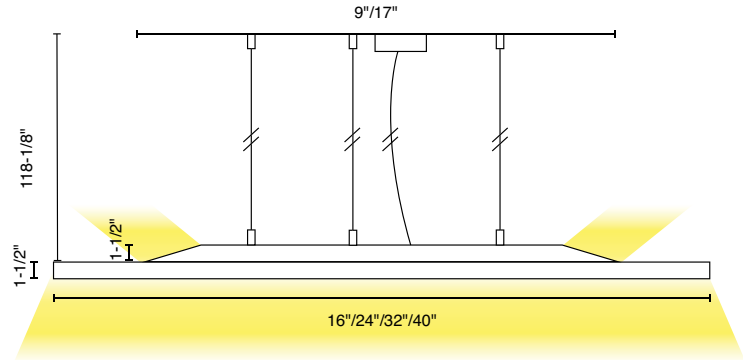

Direct/Indirect Lumen Split 70/30