


## BINA

Round & Square Standard White

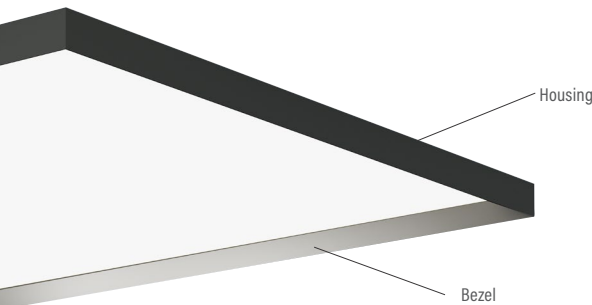

### FEATURES

- Ultra thin 1.5" profile
- Edge lit illumination
- Black, white, or matte chrome decorative bezel
- Five mounting configurations

### HOUSING

- Housing is offered with three finishes with three bezel colors of black, white and matte chrome.

### MOUNTING

- Fixture can be mounted on any wall or ceiling.

### ELECTRICAL INFO

- 30, 40, 60 and 78 Watt Direct Systems
- 45, 55, 86 and 104 Watt Direct/Indirect Systems
- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 0.1%

### LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

### LED INFO

- Luminus MP Series LED:
- CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 50,000 hrs

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

### ORDERING CODE

SERIES	BINA	bina
TYPE	RD SQ	round square
LED	SW	standard white
CCT	27K 30K 35K	2700K 3000K 3500K
SIZE	16 24 32 40	D 16" D 24" D 32" D 40"
CURRENT	325 500 675 850 1050	325mA 500mA 675mA 850mA 1050mA
LIGHT OUTPUT	D D1'	direct only direct/indirect
MOUNTING	S R AC10 CS10 RP RP5 RP6 RP8 RP10	surface mount recessed AC suspension, canopy with power cord, 10ft center canopy with AC suspension and cord, 10ft rigid pendant 4' stem with swivel stem/canopy rigid pendant 5' stem with swivel stem/canopy rigid pendant 6' stem with swivel stem/canopy rigid pendant 8' stem with swivel stem/canopy rigid pendant 10' stem with swivel stem/canopy
HOUSING COLOR	BK WH MC	black white matte chrome
BEZEL COLOR	BK WH MC	black white matte chrome
CANOPY COLOR	BK WH MC	black white matte chrome
VOLTAGE	UNV-DIM10	120V-277V integrated driver, flicker free 0-10V dimming to 1%

### ORDERING CODE

Follow the steps to specify your fixture, example:

**BINA - RD - SW - 30 - 24 - 850 - DI - AC10 - BK - WH - BK - UNV - DIM10**

### NOTES

1. recessed mount not available in ID. Direct only.

### ROUND

SIZE	DIRECT LUMEN - 3000K					WATTAGE				
	325mA	500mA	675mA	850mA	1050mA	325mA	500mA	675mA	850mA	1050mA
16"	1010	1550	2090	2630	3260	10	15	20	25	30
24"	1400	2170	2890	3610	4380	12.4	19	26	33	41.4
32"	2090	3220	4340	4570	6750	19	30	40	50	60
40"	2820	4370	5890	7290	8780	24.5	37.3	50.5	63.7	78.2


SIZE	INDIRECT LUMEN - 3000K					WATTAGE				
	325mA	500mA	675mA	850mA	1050mA	325mA	500mA	675mA	850mA	1050mA
16" / 24"	525.2	790	1050	1300	1575	5.4	7.5	9.7	12	14.8
32" / 40"	945.36	1420	1890	2340	2835	9.72	13.5	17.46	21.6	26.64

SIZE	DIRECT LUMEN - 3000K					WATTAGE				
	325mA	500mA	675mA	850mA	1050mA	325mA	500mA	675mA	850mA	1050mA
16"	950	1470	1980	2490	3080	9	14	19	24	30
24"	1390	2140	2890	3630	4480	13	19	26	33	39
32"	2000	3080	4160	5240	6470	19	29	39	49	60
40"	2790	4260	5750	7230	8930	25	38	51	64	78


SIZE	INDIRECT LUMEN - 3000K					WATTAGE				
	325mA	500mA	675mA	850mA	1050mA	325mA	500mA	675mA	850mA	1050mA
16" / 24"	525.2	790	1050	1300	1575	5.4	7.5	9.7	12	14.8
32" / 40"	945.36	1420	1890	2340	2835	9.72	13.5	17.46	21.6	26.64

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		


## MOUNTING OPTIONS

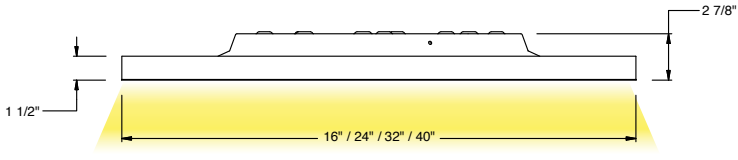


**Direct - Surface Mount**

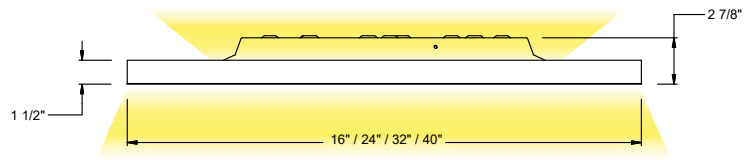


**Direct / Indirect - Surface Mount**

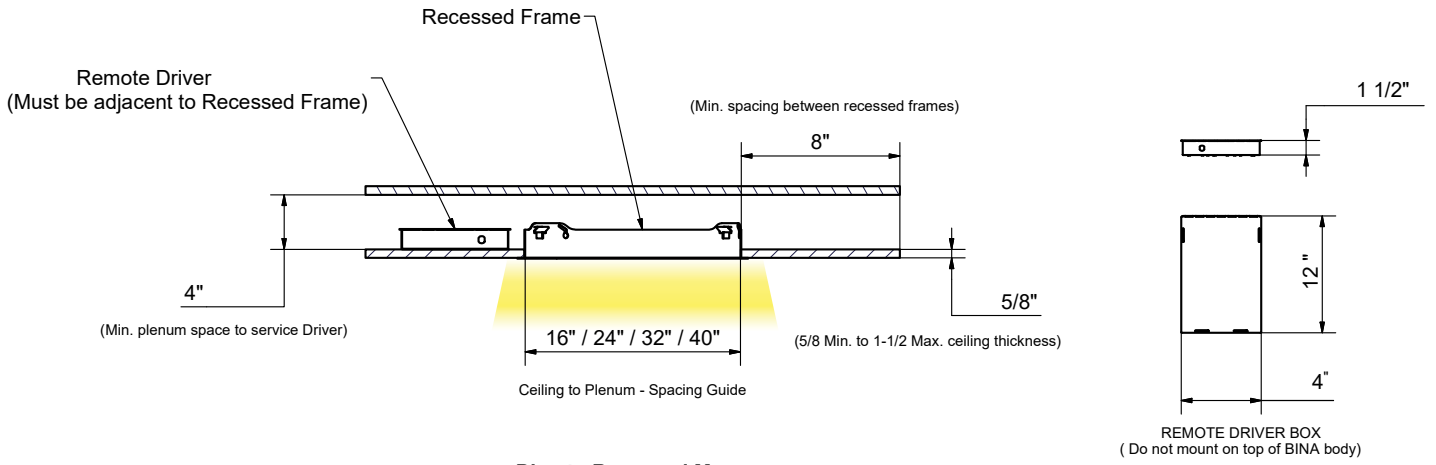

**Direct - Recessed Mount**

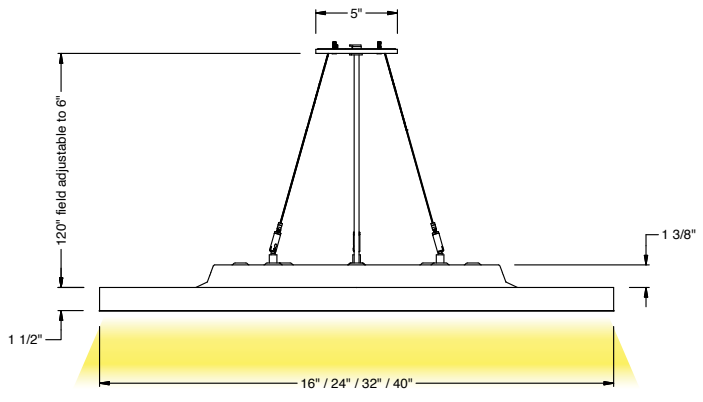


**Direct - Center Canopy Aircraft Suspension**

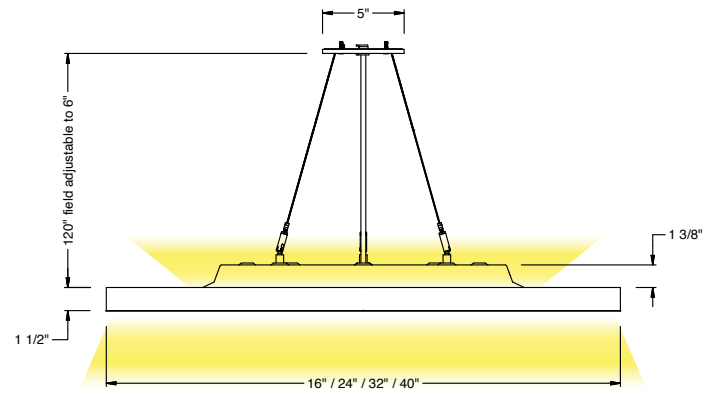


**Direct / Indirect - Center Canopy Aircraft Suspension**

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		


## MOUNTING OPTIONS

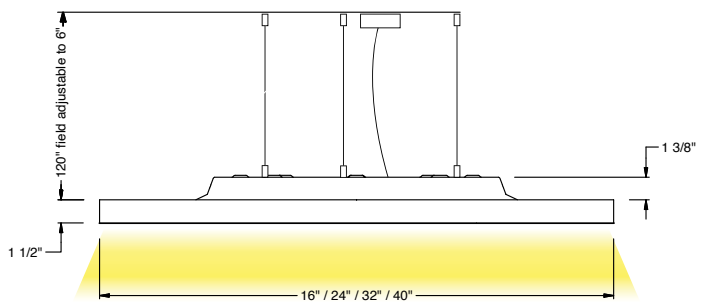


**Direct - Ceiling Aircraft Suspension**

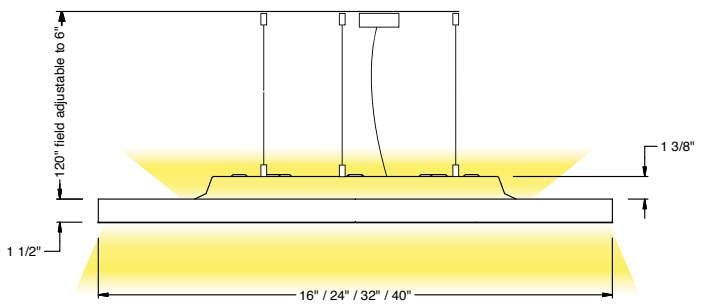

**Direct / Indirect - Ceiling Aircraft Suspension**

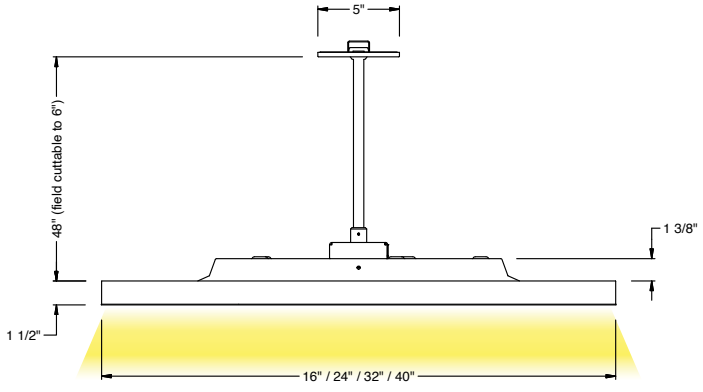


**Direct - RP Swivel**

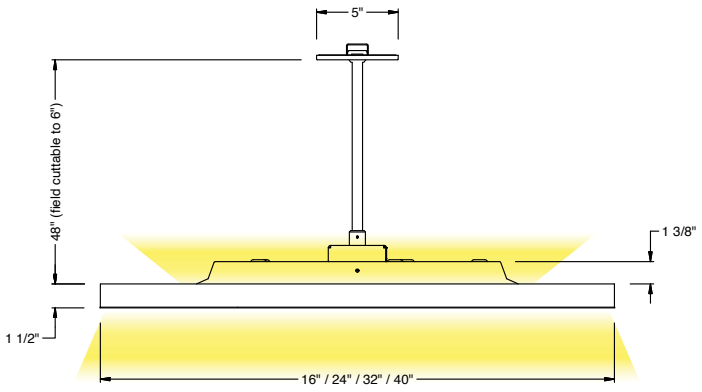


**Direct / Indirect - RP Swivel**

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		


## MOUNTING OPTIONS

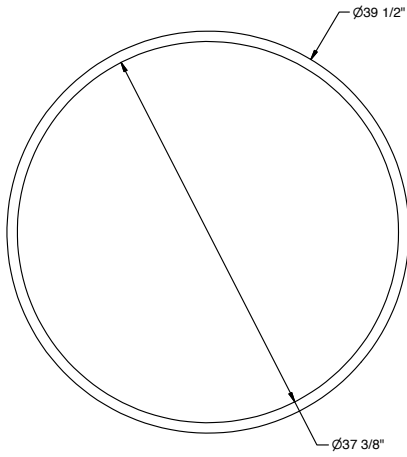


**BINA-RD 40**

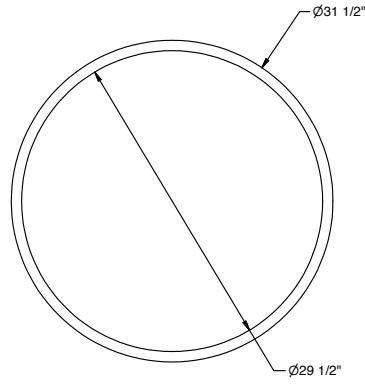


**BINA-RD 32**




**BINA-RD 24**




**BINA-RD 16**

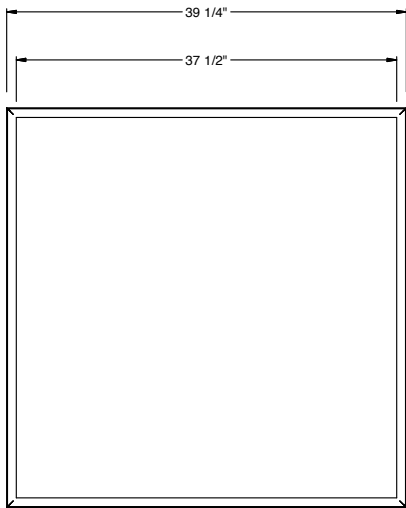


**BINA-SQ 40**

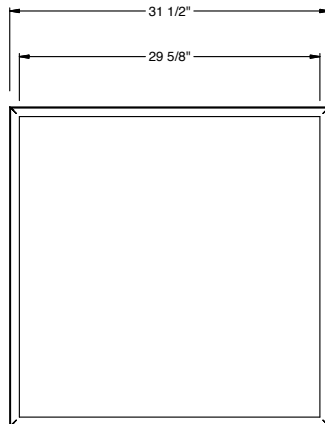

**BINA-SQ 32**



**BINA-SQ 24**



**BINA-SQ 16**