


JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## BINA Surface Mount Round Tunable White

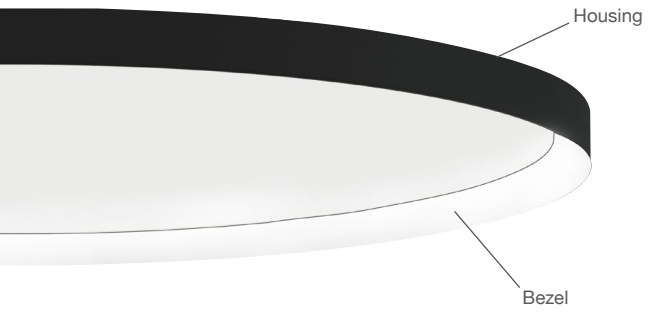

### ORDERING CODE

SERIES	BINA-S	bina surface
TYPE	RD	round
LED	TW	tunable white (Luminus)
CCT	2765	2700K to 6500K tunable white
SIZE	16 24 32 40	D 16" D 24" D 32" D 40"
DIRECT/INDIRECT	D DI	direct only direct/indirect
HOUSING	BK WH MC	black white matte chrome
BEZEL COLOR	BK WH MC	black white matte chrome

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**BINA-S - RD - TW - 2765 - 32 - D - BK - BK**

### DESCRIPTION

Slim, 1.5" aluminum luminaire in 16", 24", 36" and 40" diameter. BINA is 0-10V or DALI dimmable to 1% using EldoLED® dual driver with static white and tunable white with a range of 2700K to 6500K.

### HOUSING

- Housing is offered with three finishes with three bezel colors of black, white and matte chrome.

### MOUNTING

- Fixture can be mounted on any wall or ceiling.

### ELECTRICAL/CONTROLS

- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 0.1%


### LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0


DIRECT	4000K	INDIRECT	4000K
16"	2880 lm	16"/24"	1210 lm
24"	3330 lm	32"/40"	2755 lm
32"	5560 lm		
40"	7360 lm		

### LED INFO

- Luminus MP Series LED:  
 CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 50,000 hrs

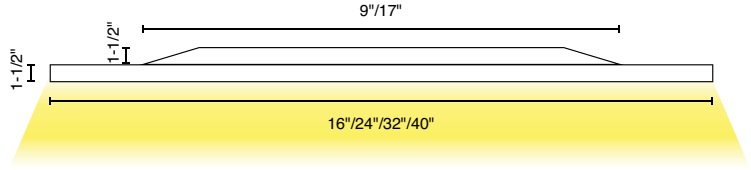

Direct

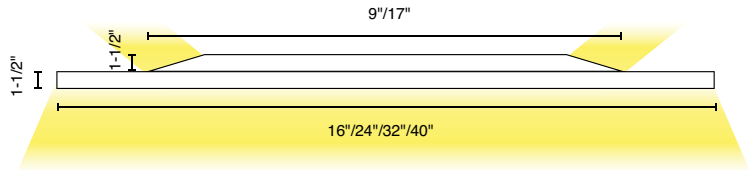

Direct/Indirect  
Lumen Split 70/30