



PERFORMANCE COVE











BEAM DISTRIBUTION

10° - 17° - 29° WALL WASH 15° - 50° ELIPTICAL LENS

MINI FLEX









BEAM DISTRIBUTION

21° - 29°

LINEALUCE









ACTUAL SIZE



ACTUAL SIZE



ACTUAL SIZE

OUTDOOR













COLORED FILTERS BLUE, RED, GREEN, AMBER





LOUVER



HONEYCOMB LOUVER

MINI LINEALUCE







BEAM DISTRIBUTION

21° - 29°

STANDARD

WHITE

UP TO **1320 LM** PER FOOT

2700K, 3000K, 3500K, 4000K, 5000K



3 1/14" TO 45 3/16" LENGTH














1800K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K



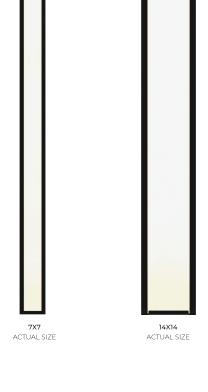













MOUNTING OPTIONS





L BRACKET



U CLIP











