

CIRO 1

Canopy, Track SW G9



119 white



121 gold-leaf

DESCRIPTION

- Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design. Most of Bruck's mini-pendant glass allows for easy screw-on/ screw-off for a simple installation or design change. Pendant L70 is 145,000 hours of operation.

HOUSING

- The hardware is offered in matte chrome or chrome finish and seconds as the pendant thermal heatsink.

MOUNTING

- The pendant can be mounted from Bruck's field adjustable canopy. The standard overall cable length of 59" can be field-cut or specified when ordering. Overall cable length is measured and begins from top of canopy. See the decorative Junction Box Cover for open ceiling applications.

- Optional track mounting: Global Trac Systems, GEO track, ECO track / Halo® Power track, and Zonyx track. Overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zonyx adapter. Cable length measurement ends at the top of glass or to the mounting arms.

- Kevlar coated cable for easy cleaning, short circuit protection, no discoloration and fraying over time.

LISTINGS

- Listed to UL1598 and UL1574 (Suitable for dry locations only)
 - Listed to CSA C22.2 #250.0 and #9.0

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		



ORDERING CODE

LIGHT SOURCE	MLED ² MSG9	standard white LED, 450 lm G9 socket
CCT	30K ¹ 35K ¹	3000K 3500K
CRI	90 ¹	90 CRI
SHADE COLOR	119 121	white gold-leaf
FINISH	BK CH MC	black with clear braided cable chrome with clear braided cable matte chrome with clear braided cable
MOUNTING OPTIONS	P ³ ECOBK ECOWH ECOMC GEOBK GEOWH GEO MC ZONMC	canopy pendant ECO/HALO black ECO/HALO white ECO/HALO matte chrome GEO black GEO white GEO matte chrome Zonyx matte chrome

ORDERING CODE

Follow the steps to specify your fixture, example:

MLED - 30K - 90 - 119 - MC - P


NOTES

1. CCT and CRI options for MLED only.
2. For LED info see page 2.
3. Canopy matches the finish chosen.

*Cable info: Clear Cable. 0.120" outer diameter. Rated to 300V & 105°C.

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

MOUNTING OPTIONS

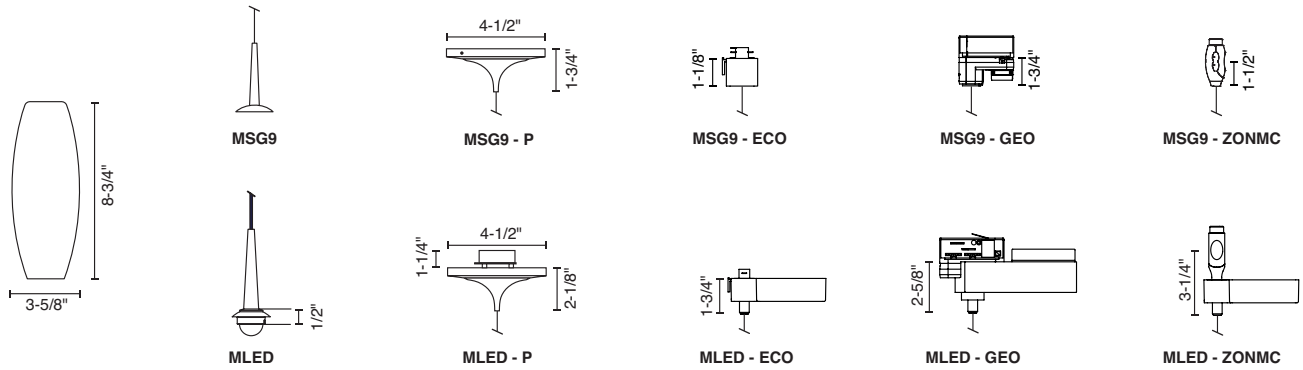

LIGHT SOURCE

Light Source	MLED - Static White LED	MSG9 - G9 SOCKET
Performance		
LED	Cree XHP50	lamp dependent
Lumens	450lm	
CCT	3000K or 3500K	
SDCM	2-Step MacAdam Ellipse	
CRI	>90	
Lumen Maintenance	$L_{70} > 145,000$ hours	
Technical Specs		
Socket Listing	<ul style="list-style-type: none"> • Integrated LED module • ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> • G9 socket • ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting		
Canopy	<ul style="list-style-type: none"> • 120-277Vac, 50/60Hz input • 7.0W, 7.5VA • Tri-mode dimming (Triac, ELV and 0-10V) • Mount to 3-1/2" to 4" round J-Box • Short circuit protection • Thermal protection 	<ul style="list-style-type: none"> • 120-277Vac, 50/60Hz input • 40W, 40VA (max 40W lamp) • Dimmable (Incandescent) • Mount to 3-1/2" to 4" round J-Box
Line Voltage Track	<ul style="list-style-type: none"> • 120Vac, 50/60Hz input • 7.0W, 7.5VA • Triac and ELV phase dimming • Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> • 120Vac, 50/60Hz input • 40W, 40VA (max 40W lamp) • Dimmable (Incandescent) • Connects to line voltage adapter (ECO, GEO, Zonyx)
Warranty		
	• 5 year limited fixture warranty	• 1 year limited fixture warranty