

JOB NAME _____

CONTACT _____

ORDERING CODE _____

ADA LM-79

ECLIPSE 2 Indirect Wall

ORDERING CODE		
SERIES	WALL	indoor wall sconce
TYPE	EC2	Eclipse 2 up and down, 17W, 620 lm up, 620 lm down
CCT	30K 35K	3000K 3500K
CRI	90	90 CRI
VOLTAGE	UNV	120V-277V
DIMMING	ELV ¹	trailing edge dimming to 5%
FINISH	BK/G WH/WH AL/WH	black outer / gold inner white outer / white inner brushed chrome outer / white inner




AL/WH BK/G WH/WH

ORDERING CODE _____

Follow the steps to specify your fixture, example:
WALL - EC2 - 30K - 90 - UNV - ELV - AL/WH

NOTES
 1. ELV only available at 120V.

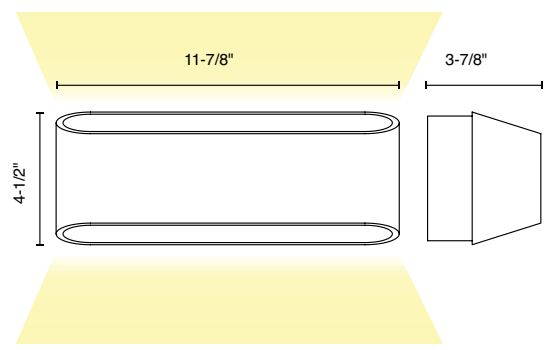

DESCRIPTION

Eclipse 2 is a indirect LED sconce made of extruded aluminum. Its contemporary organic design allows for a modern look with a warm classic glow illuminating the wall from either side of its elliptical body. Eclipse 2 includes an onboard driver. It can be easily surface mounted vertically or horizontally and can cover a standard junction box. It is offered in brushed chrome exterior housing with white inner reflector, white exterior housing with white inner reflector, or black exterior housing with gold inner reflector.

HOUSING

- Extruded aluminum housing with white, black/gold, or brushed chrome/white finish.

MOUNTING

- Mount to 3-1/2" to 4" octagonal or 4" square recessed junction box.

ELECTRICAL/CONTROLS

- Dimmer: Lutron DVELV-300P

LISTINGS

- ETLus Listed to UL1598 (suitable for dry location only)
- cETL Listed to CSA C22.2 #250.0
- ADA Compliant

LED INFO

- LED: Zigen ZGIBGX30KHO
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L₇₀ > 50,000 hrs
- Warranty: 5 year limited warranty