

GX

Wall Wash Track Mount



BK

DESCRIPTION

The GX Wall Wash is a high power, performance fixture for single circuit ECO and HALO® track. GX-WW has 3 switchable CCT settings of 3000K, 3500K and 4000K. It also is switchable for outputs of 30W, 40W and 50W outputs up to 4800 lm. Even illumination for excellent coverage allows for a highly efficient luminaire with a 90° x 50° beam distribution. Offered in black or white with matte black reflector for superior glare control or specular for increased efficiency. 360° rotation and 90° tilt for very flexible positioning.

HOUSING

- Casted aluminum housing with matte white or black finish.

MOUNTING

- ECOH track / HALO® Power Track
- ECOJ track / JUNO® single circuit
- Halo Monopoint canopy

ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input
- Selectable Power Output: 30W/40W/50W
- Selectable CCT: 3000K/3500K/4000K
- Leading and trailing edge (Triac/ELV) dimming to 5%
- 360° rotation, 90° tilt

LISTING

- ETLus Listed to UL1574 (track suitable for dry location only)
- cETL Listed to CSA C22.2 #9.0

LED INFO

- LED: Samsung SMD
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L₇₀ > 50,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	GX	
TYPE	WW	wall washer, 90°X 50°
DELLIVERED LUMENS	3PW	selectable wattage:30W / 40W / 50W
CCT	3CCT	3000K, 3500K, 4000K
CRI	90	90 CRI
REFLECTOR & LM MULTIPLIER	SR BKR	specular reflector (1.00) black reflector (0.86)
VOLTAGE	120	120V
DIMMING	ELV	leading and trailing edge (Triac/ELV) dimming to 5%
MOUNTING OPTIONS	ECOH ECOJ	ECOH/HALO - Track ECOJ/JUNO - Track
FINISH	BK WH	black white
ACCESSORIES	See page 2 for details.	

ORDERING CODE

Follow the steps to specify your fixture, example:


GX - WW - 3PW - 3CCT - 90 - BKR - 120 - ELV - ECOH - BK

DELIVERED LUMENS / LPW ²	WATTAGE		
	30W	40W	50W
CCT			
3000K	3160lm / 105 lpw	3960lm / 99 lpw	4800lm / 96 lpw
3500K	3310lm / 110 lpw	4190lm / 105 lpw	5180lm / 104 lpw
4000K	3140lm / 105 lpw	3910lm / 98 lpw	4750lm / 95 lpw




PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PRODUCT DIMENSIONS

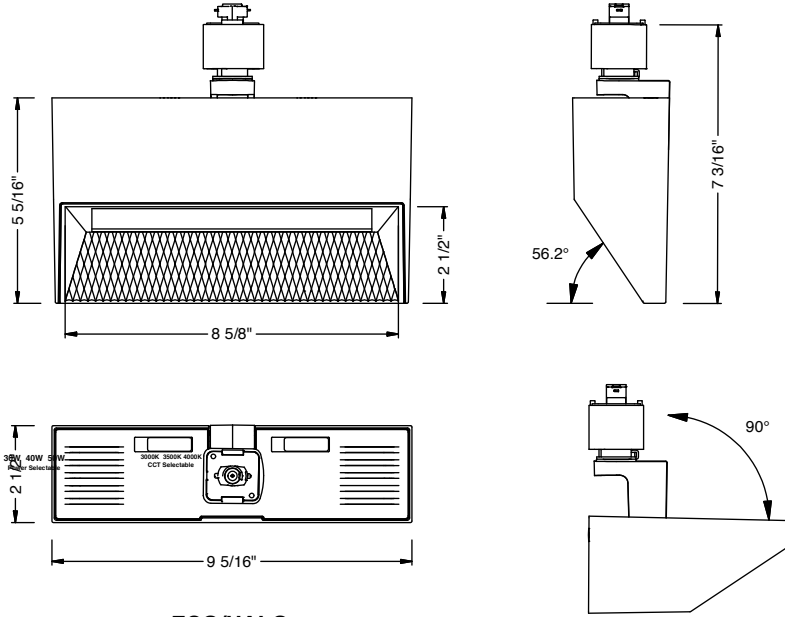

ECO/HALO

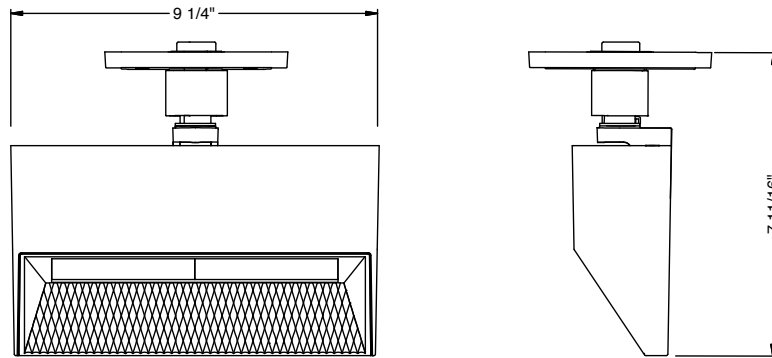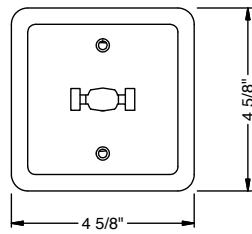


Halo Monopoint Canopy

Accessories Ordering Codes


- K20272/ECOMPBK ECO canopy square, black
- K20272/ECOMPWH ECO canopy square, white

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


PHOTOMETRIC DATA IMAGE & DISTRIBUTION CHART

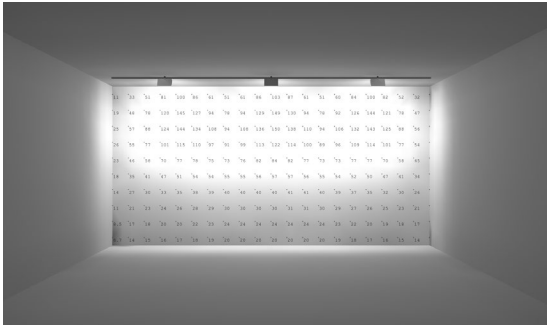


FC Wall 3ftx6ft Gray

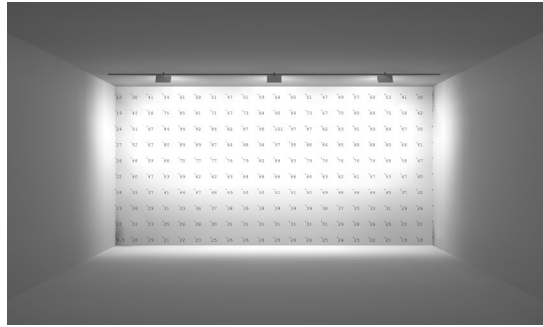


FC Wall 4ftx6ft Gray

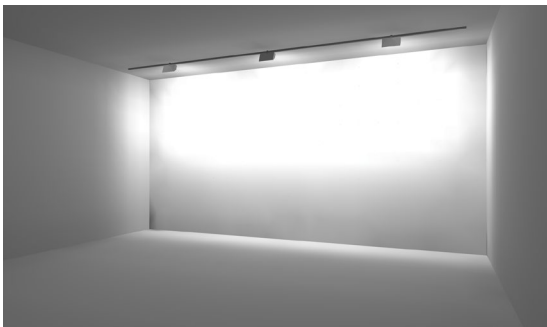


3'x6' Performance

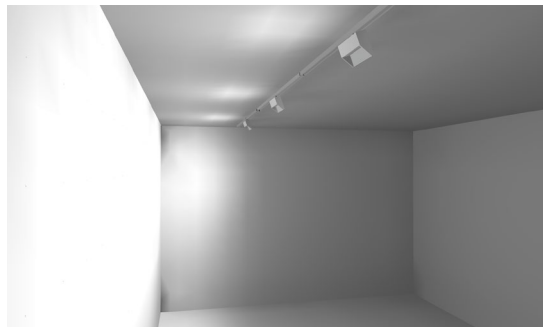

4'x6' Performance

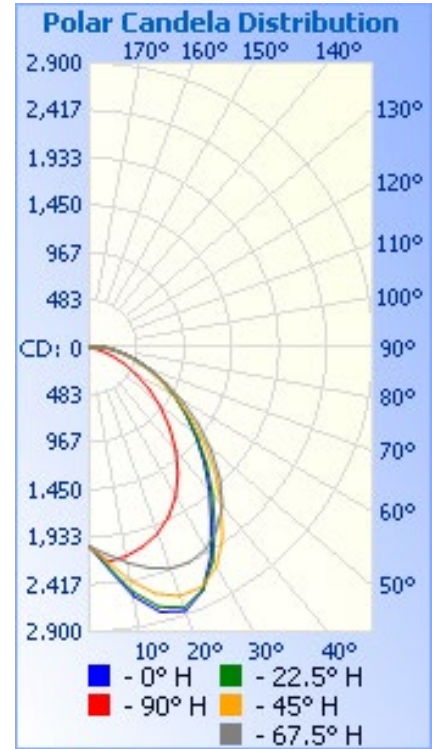

PHOTOMETRIC DATA DIAGRAM

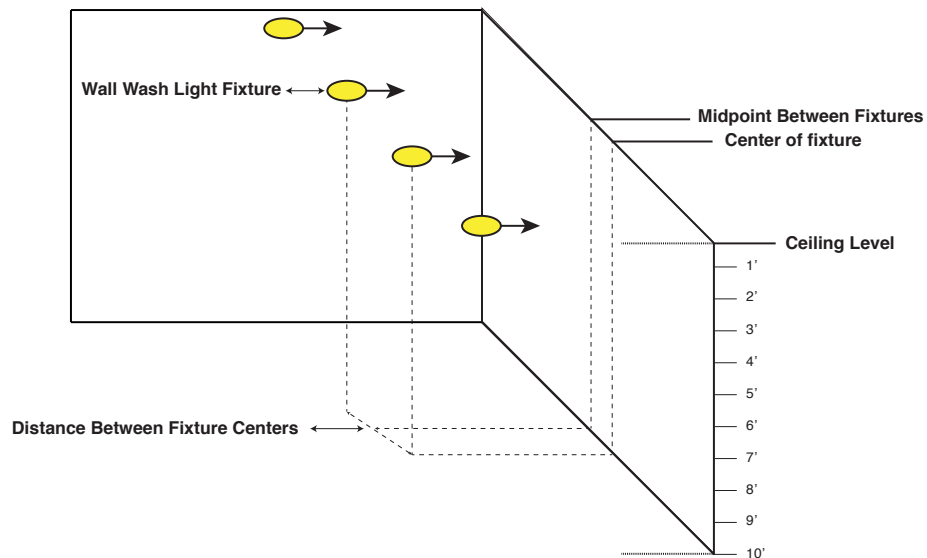

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA CHART

GX Wall Wash 50W 3000K												
MOUNTING DISTANCE	3' FROM WALL						4' FROM WALL					
FIXTURE SPACING	4' ON CENTER		6' ON CENTER		8' ON CENTER		4' ON CENTER		6' ON CENTER		8' ON CENTER	
DISTANCE FROM CEILING	CENTER	MIDPOINT	CENTER	MIDPOINT	CENTER	MIDPOINT	CENTER	MIDPOINT	CENTER	MIDPOINT	CENTER	MIDPOINT
1'	124	114	103	60	97	36	87	84	64	51	59	35
2'	182	170	149	92	140	54	123	119	90	71	82	49
3'	190	186	150	106	138	64	141	138	101	86	91	59
4'	162	160	122	96	111	63	139	137	97	87	85	62
5'	122	119	84	73	74	53	123	120	84	77	72	57
6'	86	84	57	54	49	41	100	97	66	62	56	48
7'	62	62	40	39	33	32	48	76	51	48	42	40
8'	47	47	30	29	25	25	61	59	39	37	32	32
9'	37	37	24	23	20	20	49	48	31	30	26	26
10'	31	30	20	19	17	17	41	40	26	25	22	22

NOTE
 1. Performance based on typical reflectance values, fixture installation and room dimensions. IES files available at ledrabrands.com