

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## GX10

### 2" Spot / Pendant



#### FEATURES

- 2" round cylinder
- 1100 lm
- 90+ CRI
- Track, canopy, or pendant mount
- Black or white matte finish

#### MOUNTING

- ECO track / HALO® Power Trac Track and Juno® track
- Monopoint with field cuttable stem
- Field adjustable flexible cord pendant mounting option
- ECOH or ECOJ pendant mount option

#### ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input, 12W
- Phase dimmable
- Leading and trailing edge (Triac/ELV) dimming to 5%
- 350° rotation, 90° tilt

#### LISTING

- ETLus Listed to UL1574 (track suitable for dry locations only)
- cETL Listed to CSA C22.2 #9.0

#### LED INFO

- LED: Luminus CXM-9
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L<sub>70</sub> > 55,000 hrs

#### ORDERING CODE

SERIES	GX10	
DELIVERED LUMENS	11LM	1100LM
	Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier]	
CCT & LM MULTIPLIER	27K	2700K (0.97)
	30K	3000K (1.00)
	35K	3500K (1.02)
CRI	90	90 CRI
OPTIC & LM MULTIPLIER	25D	25 degrees (0.94)
	35D	35 degrees (0.98)
	50D	50 degrees (1.00)
VOLTAGE	120	120V
DIMMING	ELV	leading and trailing edge (Triac/ELV) dimming to 5%
MOUNTING OPTIONS	P	pendant, 120" flexible cord
	MP	monopoint canopy
	ECOH	ECOH/HALO - Track
	ECOJ <sup>1</sup>	ECOJ/JUNO - Track
	ECOHP	ECOH/HALO pendant, 120" flexible cord
ECOJP <sup>1</sup>	ECOJ/JUNO pendant, 120" flexible cord	
FINISH	BK	black
	WH	white
ACCESSORIES	See the last page for details.	

Follow the steps to specify your fixture, example:  
**GX10 - 11LM - 30K - 90 - 35D - 120 - ELV - ECOJ - BK**

#### NOTES

1. Adaptor designed with adjustable conductor for 2 circuit J-Type tracks.

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## PHOTOMETRIC DATA

11LM CCT MULTIPLIERS	
	90CRI
2700K	0.97
3000K	1.00
3500K	1.02
FC Formula = CBCP / Distance <sup>2</sup>	

25D 25.6° NO ACCESSORY	
Throw Distance (ft)	Beam Diameter (ft)
6	9.2
8	5.2
10	3.3
12	2.3
14	1.7
Illuminance at Center (fc)	
WATTS: 12	LPW: 87.3
LUMENS: 1047	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3320
5	2987
15	1304
25	387
35	174
45	78

35D 37.0° NO ACCESSORY	
Throw Distance (ft)	Beam Diameter (ft)
6	6.1
8	3.4
10	2.2
12	1.5
14	1.1
Illuminance at Center (fc)	
WATTS: 12	LPW: 92.5
LUMENS: 1110	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	2199
5	2107
15	1412
25	639
35	212
45	64

50D 50.4° NO ACCESSORY	
Throw Distance (ft)	Beam Diameter (ft)
6	3.8
8	2.1
10	1.4
12	1.0
14	0.7
Illuminance at Center (fc)	
WATTS: 12	LPW: 92.8
LUMENS: 1114	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	1369
5	1334
15	1081
25	695
35	319
45	127

11LM CCT MULTIPLIERS	
	90CRI
2700K	0.97
3000K	1.00
3500K	1.02
FC Formula = CBCP / Distance <sup>2</sup>	


25D 25.6° SNOOT-BK	
Throw Distance (ft)	Beam Diameter (ft)
6	9.3
8	5.2
10	3.4
12	2.3
14	1.7
Illuminance at Center (fc)	
WATTS: 12	LPW: 76.4
LUMENS: 917	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3359
5	3027
15	1321
25	373
35	120
45	20

35D 37.4° SNOOT-BK	
Throw Distance (ft)	Beam Diameter (ft)
6	6.1
8	3.5
10	2.2
12	1.5
14	1.1
Illuminance at Center (fc)	
WATTS: 12	LPW: 82.2
LUMENS: 987	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	2209
5	2124
15	1438
25	591
35	156
45	15


50D 47.8° SNOOT-BK	
Throw Distance (ft)	Beam Diameter (ft)
6	3.8
8	2.1
10	1.4
12	0.9
14	0.7
Illuminance at Center (fc)	
WATTS: 12	LPW: 71.7
LUMENS: 861	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	1362
5	1330
15	1082
25	620
35	197
45	22

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		



## MOUNTING OPTIONS




**ECOH**




**ECOJ**

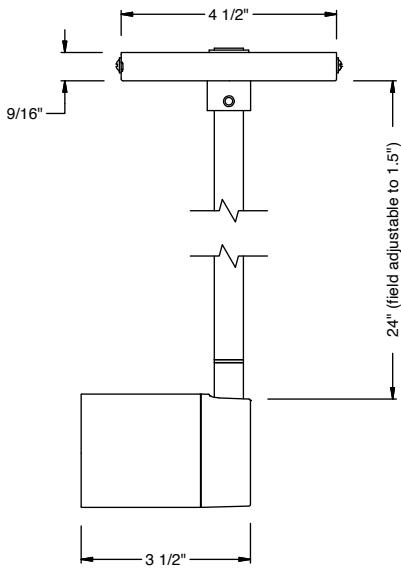


**MONOPOINT**

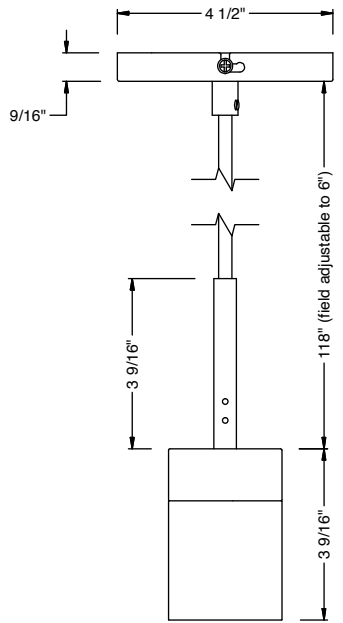

**PENDANT**

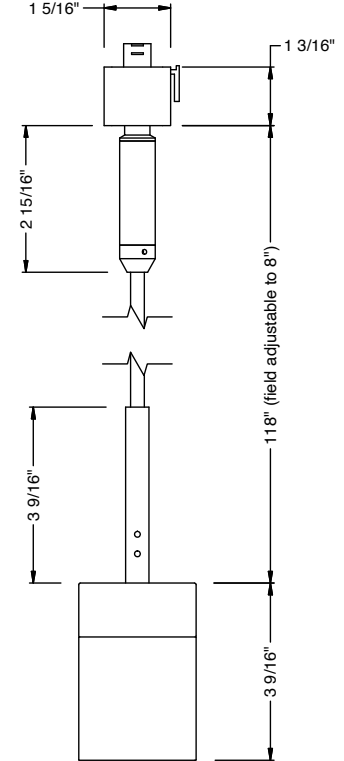

**ECOHP / ECOJP**



PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## ACCESSORIES


Follow the steps to specify your fixture, example:

**GX10 - 11LM - 30K - 90 - 35D - 120 - ELV - ECOH - BK - SNOOTBK**


### Accessories

- GX10-SNOOT-BK**    snoot, black
- GX10-SNOOT-WH**    snoot, white
- GX10-HCL-BK**    honeycomb louver, black
- GX10-HCL-WH**    honeycomb louver, white
- K20272/ECOMPBK**    eco canopy, black
- K20272/ECOMPWH**    eco canopy, white

**NOTE:** Omit GX10 from code when requesting accessory with fixture.  
 Fixture will only accept one accessory at a time.

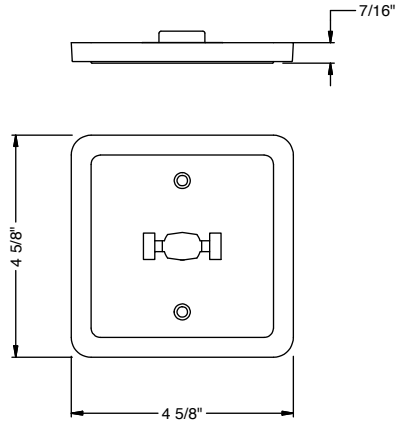

## SNOOT

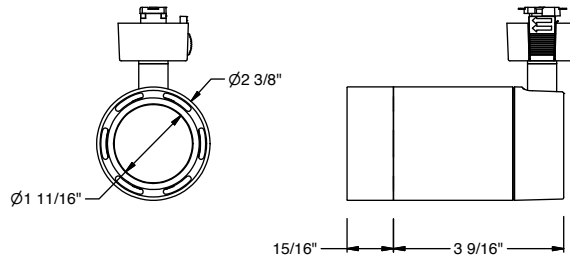

## HONEYCOMB LOUVER

