


JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## JAZZ Pendant Square

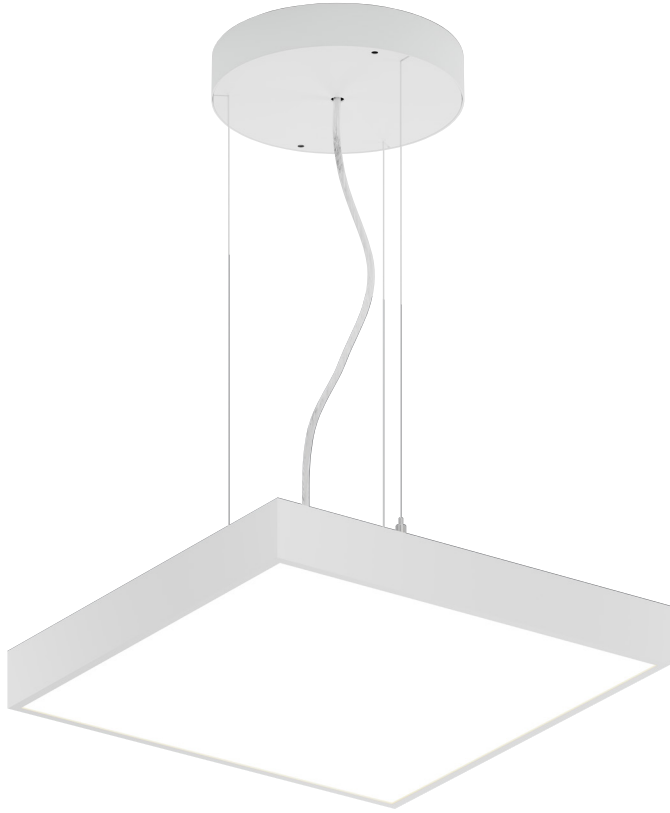

### ORDERING CODE

<b>SERIES</b>	JAZZ-P	jazz pendant
<b>TYPE</b>	SQ	square
<b>SIZE</b>	16 24 36	16"x16" 24"x24" 36"x36"
<b>LIGHT OUTPUT</b>	D DI	direct only direct/indirect
<b>CURRENT</b>	500 700 900	500mA 700mA 900mA
<b>CCT</b>	27K 30K 35K 40K	2700K 3000K 3500K 4000K
<b>CRI</b>	90	90 CRI
<b>HOUSING FINISH</b>	<b>STANDARD</b> BK white WH white GY grey	
	<b>SPECIALTY</b> AN anthracite BB berry blue BL blue BZ bronze CP copper CR creme FO forest GD gold HG highland green ML merlot SP sepia TR terra CC <sup>1</sup> custom color, consult factory for details	
<b>CANOPY FINISH</b>	<b>STANDARD</b> BK white WH white GY grey	
	<b>SPECIALTY</b> AN anthracite BB berry blue BL blue BZ bronze CP copper CR creme FO forest GD gold HG highland green ML merlot SP sepia TR terra CC <sup>1</sup> custom color, consult factory for details	
<b>DIMMING</b>	UNV-DIM10	120V-277V integrated driver, flicker free 0-10V dimming to 1%

### ORDERING CODE

\_\_\_\_\_

Follow the steps to specify your fixture, example:  
**JAZZ - P - SQ - 24 - DI - 700 - 30K - 90 - BK - BK - UNV - DIM10**

### NOTES

1. Custom set up fee plus minimum quantity required per color.

### FEATURES

- Multiple lumen packages available
- Offered in 16", 24", and 36" sizes
- Direct and Indirect light outputs
- Wide variety of canopy and housing finish options available

### CONSTRUCTION

- Slim 2" aluminum luminaire
- Robust casted aluminum mounting hardware
- High-tension stainless-steel Aircraft suspension cables

### ELECTRICAL/CONTROLS

- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 1.0%

### LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0


### LED INFO

- SAMSUNG LM281B+ LED: CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>80</sub> > 50,000 hrs

SIZE	DIRECT (3000K)		
	500mA	700mA	900mA
16"	1470lm / 15W	2040lm / 20W	2620lm / 24W
24"	2950lm / 26W	4080lm / 35W	5240lm / 44W
36"	7390lm / 61W	10210lm / 85W	12370lm / 103W

SIZE	INDIRECT (3000K)		
	500mA	700mA	900mA
16"	408lm / 4W	564lm / 5W	724lm / 5W
24"	816lm / 5W	1128lm / 8W	1448lm / 10W
36"	1632lm / 12W	2557lm / 17W	2733lm / 20W

### COLOR OPTIONS

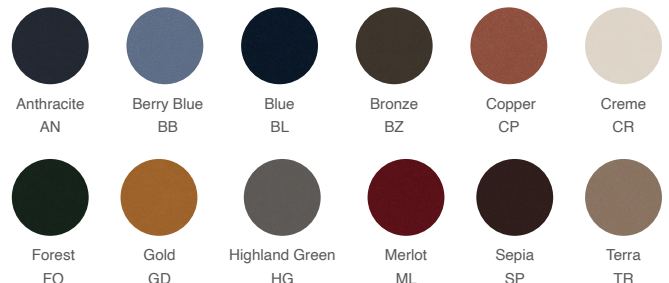

## PRODUCT DIMENSIONS

