

LX SERIES

Track Pendant RGBW



BK

DESCRIPTION

- LX is a versatile series of performance spec-grade spots and cylinders. LX is rich in technology offering the best-in-class static and dynamic LED components, premium optics and dimming controls. Glare accessories and specialty optics are offered for all variations. Several Mounting options include nine track systems, monopoint spots and pendants, surface mount and conduit j-box cover with knockouts for open ceiling applications. It is offered in a fine detailed matte finish in black and white.

HOUSING

- Casted aluminum housing in textured: black and white.
- Consult factory for custom finishes.

MOUNTING

- Global track systems, GEO track, ECO track / HALO® Power Trac track, Zonyx track, Juno® track, and Lightolier®.

LISTING

- CSAus Listed to UL1574 (track suitable for dry locations only)
- cCSA Listed to CSA C22.2 #9.0

LED INFO

- LED Engin LuxiGen LED: SDCM = 3-step MacAdam Ellipse; Lumen Maintenance: L₇₀ > 20,000 hrs per emitter

PROJECT INFORMATION			
JOB NAME	500 lm, CBCP 2.960	TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	LX		
TYPE	35		
LED	RGBW	red, green, blue, white (white at 4000K)	
DELIVERED LUMENS	10LM ¹	500 lm, CBCP 2.960 Standard Configuration: White at 4000K 15D lumens, CBCP narrow beam option	
CRI	90	90 CRI	
REFLECTOR & LM MULTIPLIER	15D 25D 40D 60D LV ²	15 degrees (1.00) 25 degrees (1.00) 40 degrees (0.99) 60 degrees (0.92) LensVector dynamic beam control 15° - 60° (0.80)	
VOLTAGE	120	120V	
DIMMING	CASZ	Casambi Bluetooth dim to zero	
MOUNTING OPTIONS	ECOHPX ECOJPX LGTRPX GEOPX ZONYPX ³ X = desired	ECOH/HALO pendant - single circuit ECOJ/JUNO pendant - single circuit Lightolier pendant - single circuit GEO pendant - two circuit, two neutral Zonyx pendant - single circuit cable length from 6" to 120"	
FINISH	BK WH	black white	
ACCESSORIES	See the last page for details.		

ORDERING CODE

Follow the steps to specify your fixture, example:

LX - 35 - RGBW - 10LM - 90 - 40D - 120 - CASZ - ECOP48 - WH

RGBW (LED)					POWER
DELIVERED LM					W (90 CRI)
ALL	RED	GREEN	BLUE	WHITE	-
1000	240	340	120	500	22


Power Factor ≥ 0.9

NOTES


1. Reference power table for "ALL ON" or individual outputs.
2. LV available only in Casambi. Standard Configuration: Narrowest beam. Length of fixture increases by 1/8".
3. Zonyx track adapter available only in MC.

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		


MOUNTING OPTIONS

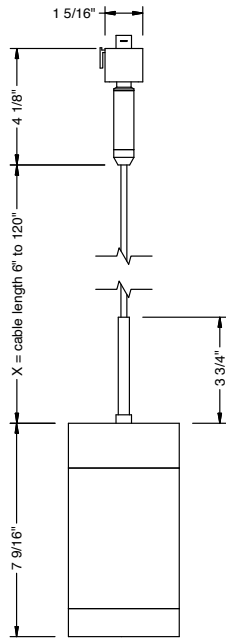



**CABLE PENDANT
E/H, J and L TYPE**

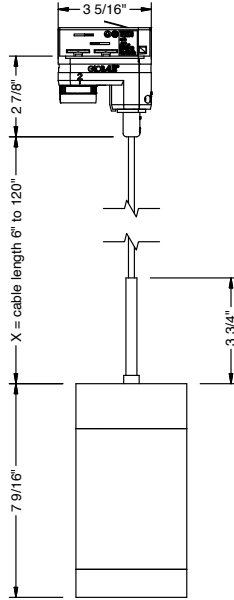

**CABLE PENDANT
GEO**

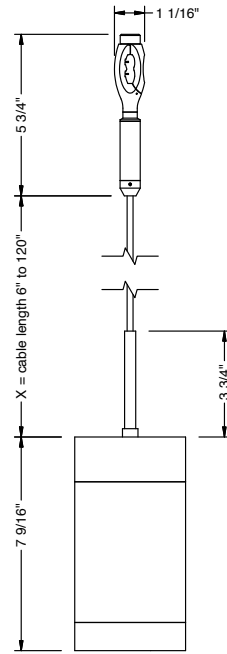

**CABLE PENDANT
ZONYX**

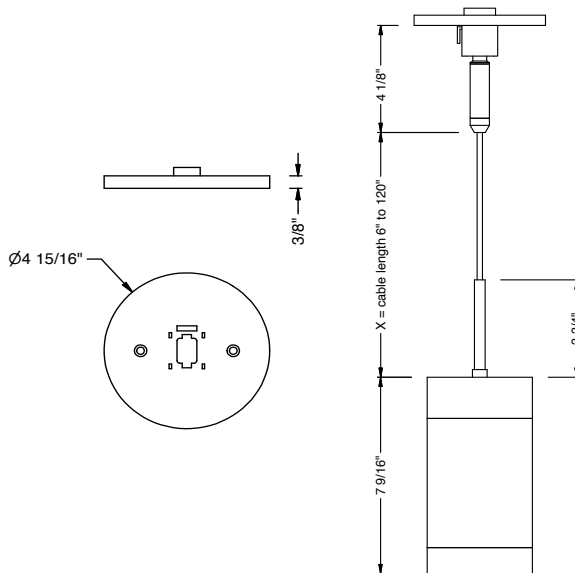

**ECO MONOPOINT
PENDANT CANOPY**

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

ACCESSORIES

Accessories Ordering Codes^{1,2,3}


HCL	honeycomb louver (Cat. No. 81331)
BDBK	barndoor, black (Cat. No. K20278)
SNTBK	snoot, black (Cat. No. 81347BK)
SNTWH	snoot, white (Cat. No. 81347WH)
SHNTBK	shroud snoot, black (Cat. No. 81348BK)
SHNTWH	shroud snoot, white (Cat. No. 81348WH)
E	elliptical lens, 30° X 60° (Cat. No. 74258)
SBL	smoothing beam lens (Cat. No. 74207-SBL)
DL	diffused lens (Cat. No. 74207)
BW	batwing lens (Cat. No. 74259)

AB	asymmetric beam lens (Cat. No. 74261)
HET	high efficiency textured lens, similar to Solite™ (Cat. No. 74262)
GRL	glare reduction lens (Cat. No. 74257)
CF-RD	color filter - red (Cat. No. 74272-RD)
CF-BL	color filter - blue (Cat. No. 74272-BL)
CF-GR	color filter - green (Cat. No. 74272-GR)
CF-AM	color filter - amber (Cat. No. 74272-AM)
81464	bezel removal tool
370GES70BK	ECO canopy round, black
370GES70WH	ECO canopy round, white



NOTES

- Complete fixture ordering code by adding accessory ordering code. To order the accessory only use the catalog number.
- Maximum 2pcs of media per fixture. Standard Configuration includes clear lens, which is replaceable with other media.
- For best performance pair lenses with 15D or 25D beam option.



LIGHT DISTRIBUTION

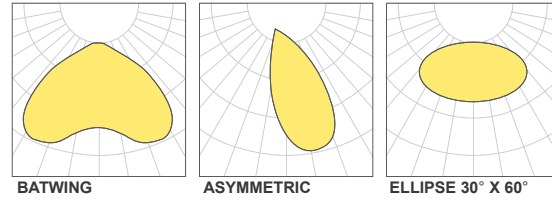



HONEYCOMB LOUVER



SNOOT



SHROUD SNOOT

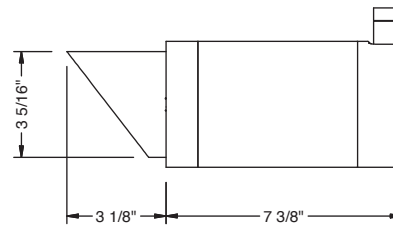

BARNDOOR

