

MOTO-ZERO 40

1.5" Motorized Spot
Standard White, Super Narrow

formalighting
COLLECTION

CASAMBI



FEATURES

- Two Motor Drive – 90° Tilt and 350° Rotation.
- Super narrow 10° beam option.
- Motion, and dimming controlled by Casambi®.
- Black and white finishes available.

HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

MOUNTING

- EVO multi-system track by stucchi

ELECTRICAL/CONTROLS

- Full Casambi control: dimming and motion.

LISTING

- cCSAus Listed to UL1574 (track suitable for dry locations only)

LED INFO

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 60,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	MOTO	motorized track spot
TYPE	MS1	1.5" motorized track spot
LED	SW	standard white
DELIVERED LUMENS	05LM	260 lm Standard Configuration: 3000K, 10D optic
CCT	30K 40K	3000K (1.00) 4000K (1.05)
CRI	90	90 CRI
VOLTAGE	48	48V
REFLECTOR	N	narrow, TIR optic10°, CBCP 4,500
DIMMING	CAS ¹	Casambi Bluetooth control with flicker free 1% dimming
FINISH	BK WH	black white
MOUNTING OPTIONS	MEVO	stucchi multi-system track

ORDERING CODE

Follow the steps to specify your fixture, example:

MOTO - MS1 - SW - 05LM - 30K - 90 - 48 - N - CAS - BK - MEVO

SW (LED)	POWER
DELIVERED LM	W (90 CRI)
260	5


NOTES

1. Motion and dimming control by Casambi.

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

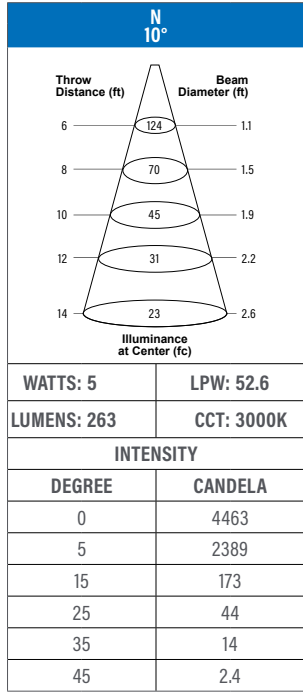

PRODUCT DIMENSIONS

