

# **MOTO-ZERO 40**

# 1.5" Motorized Spot Tunable White







#### **FEATURES\***

- Two Motor Drive 90° Tilt and 350° Rotation.
- 25°, 30° and 40° beam options.
- Motion, CCT control, and dimming controlled by Casambi®.
- Black and white finishes available.

#### HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

- EVO muti-system track by stucchi

#### **ELECTRICAL/CONTROLS**

- Full Casambi control: dimming, motion and CCT.

- cCSAus Listed to UL1574 (track suitable for dry locations only)

# LED INFO

- Luminus tunable white COB: 90 CRI, R9 > 70: SDCM = 3-step MacAdam Ellipse; Lumen Maintenance:  $L_{70} > 54,000$  hrs

\*Fixture is not designed or intended for scene setting. Refer Motolux Pro specification sheet for this type of application requirement.

PROJECT INFOR	PROJECT INFORMATION PROJECT INFORMATION				
JOB NAME		TYPE			
ORDERING CODE					

## ORDERING CODE

SKERING CODE				
SERIES MOTO		motorized track spot		
TYPE	MS1	1.5" motorized track spot		
LED	TW	tunable white		
DELIVERED LUMENS	05LM Standard Config	490 lm uration: 3500K, 250 optic		
сст	2765	2700K to 6500K tunable white		
CRI	90	90 CRI		
VOLTAGE	48	48V		
REFLECTOR	25D 30D 40D	25 degrees25°, CBCP 1,500 30 degrees30°, CBCP 1,300 40 degrees40°, CBCP 930		
DIMMING	CAS <sup>1</sup>	Casambi Bluetooth control with flicker free 1% dimming		
FINISH	BK WH	black white		
MOUNTING OPTIONS	MEVO	stucchi muti-system track		
ACCESSORIES	SORIES See the last page for details.			

#### ORDERING CODE

Follow the steps to specify your fixture, example: MOTO - MS1 - TW - 05LM - 2765 - 90 - 48 - 25D - CAS - WH - MEVO

SW (LED)	POWER	
DELIVERED LM	W (80 CRI)	
490	8	

#### NOTES


1. Motion, dimming and CCT control by Casambi.



PROJECT INFOR	ROJECT INFORMATION				
JOB NAME		TYPE			
ORDERING CODE					


# PHOTOMETRIC DATA

## **NO ACCESSORY**




**CANDELA** 


31°				
Beam Diameter (ft)				
3.4				
8 4.5				
10 5.6				
12 9 6.7				
7 7.9				
Illuminance at Center (fc)				
LPW: 56.1				
CCT: 3000K				
INTENSITY				
CANDELA				
1300				
1212				
690				
229				
48				
10				

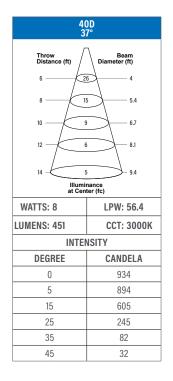


#### **HCL**

DEGREE



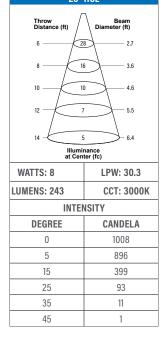


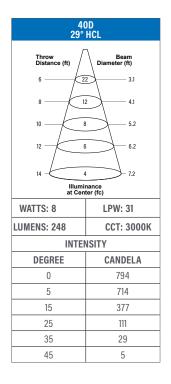



JOB NAME TYPE ORDERING CODE

# PRODUCT DIMENSIONS

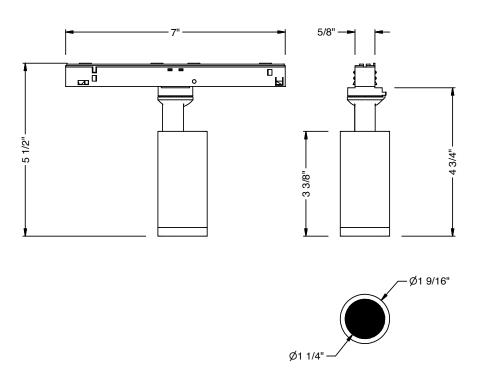

# **ACCESSORIES**

### Accessories Ordering Codes<sup>1</sup>

honeycomb louver (Cat. No. MOTO-MS1-SW-48-HCL) HCL

# NOTES

Complete fixture ordering code by adding accessory ordering code.
To order the accessory only use the catalog number.

# **HONEYCOMB LOUVER**



