

MOTO-ZERO 40

1.5" Motorized Zoom Spot
Tunable White

formalighting
COLLECTION CASAMBI



FEATURES

- Two Motor Drive – 90° Tilt and 350° Rotation.
- 15° - 45° optical beam shaping.
- Motion, CCT control, beam and dimming controlled by Casambi®.
- Black and white finishes available.

HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

MOUNTING

- EVO multi-system track by stucchi

ELECTRICAL/CONTROLS

- Full Casambi control: dimming, motion, CCT and beam shaping.

LISTING

- cCSAus Listed to UL1574 (track suitable for dry locations only)

LED INFO

- Luminus tunable white COB:
90 CRI, R9 > 70: SDCM = 3-step MacAdam Ellipse; Lumen Maintenance: L₇₀ > 54,000 hrs

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	MOTO	motorized track spot
TYPE	MZ1	1.5" motorized zoom track spot
LED	TW	tunable white
DELIVERED LUMENS	05LM	510 lm Standard Configuration: 3500K
CCT	2765	2700K to 6500K tunable white
CRI	90	90 CRI
VOLTAGE	48	48V
REFLECTOR	BS1	beam shaping 15° - 45°, CBCP 3,500 - 800
DIMMING	CAS ¹	Casambi Bluetooth control with flicker free 1% dimming
FINISH	BK WH	black white
MOUNTING OPTIONS	MEVO	stucchi multi-system track

Follow the steps to specify your fixture, example:
MOTO - MZ1 - TW - 05LM - 30K - 90 - 48 - BS1 - CAS - WH - MEVO

NOTES

1. Motion, dimming, CCT and beam shaping control by Casambi.



*Fixture is not designed or intended for scene setting. Refer Motolux Pro specification sheet for this type of application requirement.

SW (LED)	POWER
DELIVERED LM	W (80 CRI)
510	11

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

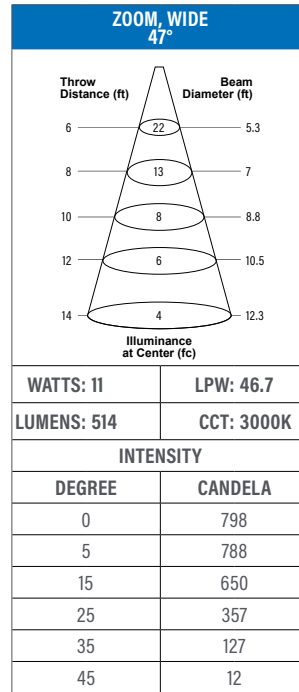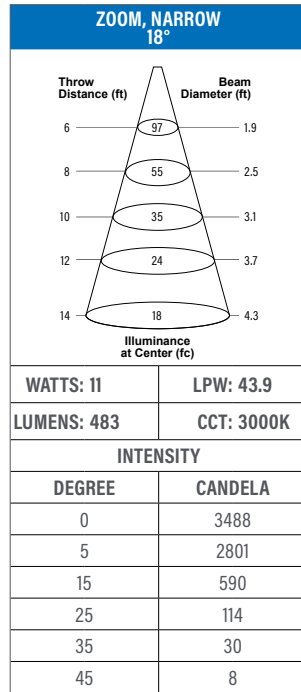

PRODUCT DIMENSIONS

