

MOTO-ZERO 40

1.5" Motorized Zoom Spot Standard White

formalighting
COLLECTION

CASAMBI



FEATURES

- Two Motor Drive – 90° Tilt and 350° Rotation.
- 15° - 35° optical beam shaping.
- Motion, beam and dimming controlled by Casambi®.
- Black and white finishes available.

HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

MOUNTING

- EVO multi-system track by stucchi

ELECTRICAL/CONTROLS

- Full Casambi control: dimming, motion and beam shaping.

LISTING

- cCSAus Listed to UL1574 (track suitable for dry locations only)

LED INFO

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 60,000 hrs

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	MOTO	motorized track spot
TYPE	MZ1	1.5" motorized zoom track spot
LED	SW	standard white
DELIVERED LUMENS	07LM	730 lm Standard Configuration: 3000K
CCT	30K 40K	3000K (1.00) 4000K (1.05)
CRI	90	90 CRI
VOLTAGE	48	48V
REFLECTOR	BS1	beam shaping 15° - 35, CBCP 8,600 - 2,500
DIMMING	CAS ¹	Casambi Bluetooth control with flicker free 1% dimming
FINISH	BK WH	black white
MOUNTING OPTIONS	MEVO	stucchi multi-system track

ORDERING CODE

Follow the steps to specify your fixture, example:

MOTO - MZ1 - SW - 07LM - 30K - 90 - 48 - BS1 - CAS - WH - MEVO

SW (LED)	POWER
DELIVERED LM	W (80 CRI)
730	11



NOTES

1. Motion, dimming and beam shaping control by Casambi.

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

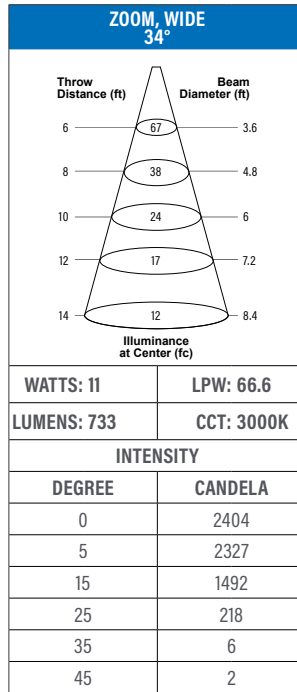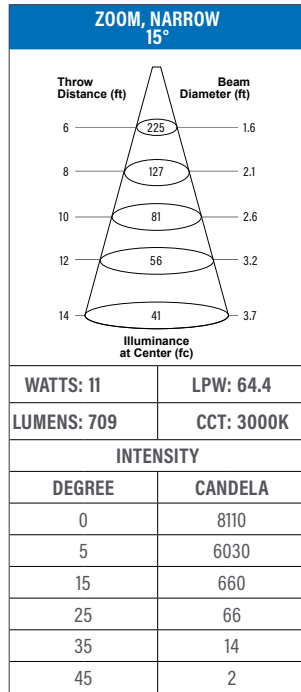

PRODUCT DIMENSIONS

