

## MOTO-ZERO 68

2.5" Motorized Spot Standard White, Super Narrow

formalighting  
COLLECTION

CASAMBI



### FEATURES

- Two Motor Drive – 90° Tilt and 350° Rotation.
- Super Narrow 5° beam option.
- Motion and dimming controlled by Casambi®.
- Black and white finishes available.

### HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

### MOUNTING

- EVO multi-system track by stucchi

### ELECTRICAL/CONTROLS

- Full Casambi control: dimming and motion.

### LISTING

- cCSAus Listed to UL1574 (track suitable for dry locations only)

### LED INFO

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 60,000 hrs

### PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

### ORDERING CODE

SERIES	MOTO	motorized track spot
TYPE	MS2	2.5" motorized track spot
LED	SW	standard white
DELIVERED LUMENS	05LM	400 lm Standard Configuration: 3000K 5D optic
CCT	30K 40K	3000K (1.00) 4000K (1.05)
CRI	90	90 CRI
VOLTAGE	48	48V
REFLECTOR	N	narrow, TIR optic5°, CBCP 21,800
DIMMING	CAS <sup>1</sup>	Casambi Bluetooth control with flicker free 1% dimming
FINISH	BK WH	black white
MOUNTING OPTIONS	MEVO	stucchi multi-system track

### ORDERING CODE

Follow the steps to specify your fixture, example:

MOTO - MS2 - SW - 05LM - 30K - 90 - 48 - N - CAS - BK - MEVO

SW (LED)	POWER
DELIVERED LM	W (80 CRI)
400	6


### NOTES

1. Motion and dimming control by Casambi.

**PROJECT INFORMATION**

JOB NAME		TYPE	
ORDERING CODE			

**PHOTOMETRIC DATA**

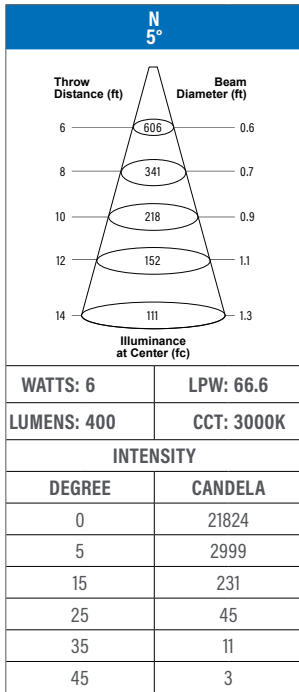

**PRODUCT DIMENSIONS**

