

MOTO-ZERO 68

2.5" Motorized Spot Standard White



CAS MBI



FEATURES

- Two Motor Drive 90° Tilt and 350° Rotation.
- 15°, 25° and 35° beam options.
- Motion and dimming controlled by Casambi®.
- Black and white finishes available.

- Casted aluminum housing and integrated driver in adapter with black or white finish.

MOUNTING

- EVO muti-system track by stucchi

ELECTRICAL/CONTROLS

- Full Casambi control: dimming and motion.

- cCSAus Listed to UL1574 (track suitable for dry locations only)

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 60,000 hrs

PROJECT INFOR	TINFORMATION				
JOB NAME		TYPE			
ORDERING CODE					

ORDERING CODE

CHBEHING COBE				
SERIES	мото	motorized track spot		
TYPE	MS2	2.5" motorized track spot		
LED	sw	standard white		
DELIVERED LUMENS	15LM 1260 Standard Configuration: 3000K , 25D optic			
сст	30K 40K	3000K 4000K		
CRI	90	90 CRI		
VOLTAGE	48	48V		
REFLECTOR	15D 25D 35D	15 degrees15°, CBCP 8,030 25 degrees25°, CBCP 4,780 35 degrees35°, CBCP 3,120		
DIMMING	CAS ¹	Casambi Bluetooth control with flicker free 1% dimming		
FINISH	BK WH	black white		
MOUNTING OPTIONS	MEVO	stucchi muti-system track		
ACCESSORIES	See the last page for details.			

ORDERING CODE

Follow the steps to specify your fixture, example: MOTO - MS2 - SW - 15LM - 30K - 90 - 48 - 15D - CAS - BK - MEVO

SW (LED)	POWER	
DELIVERED LM	W (80 CRI)	
1260	15	

NOTES


Motion and dimming control by Casambi.





PROJECT INFOR	RMATION			
JOB NAME		TYPE		
ORDERING CODE				

PHOTOMETRIC DATA


NO ACCESSORY

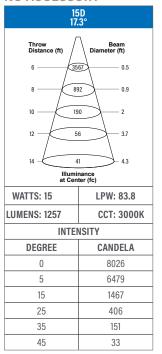


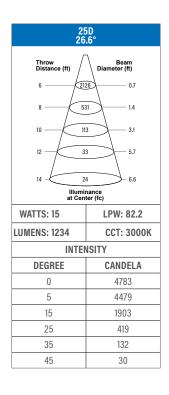


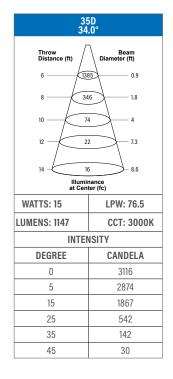

HCL

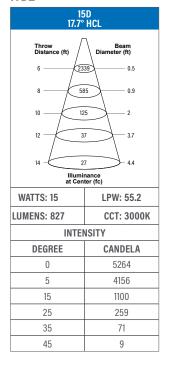

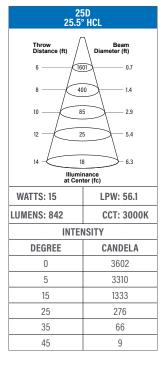


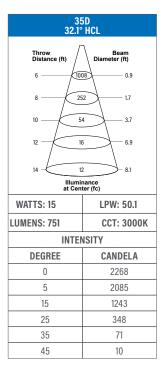



PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PRODUCT DIMENSIONS

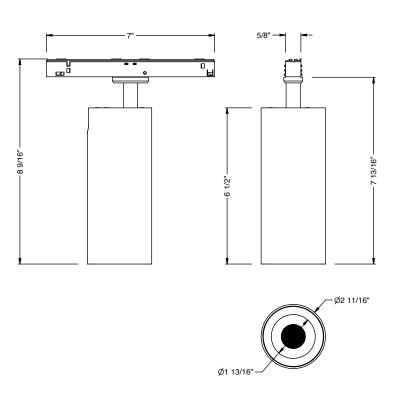

ACCESSORIES

Accessories Ordering Codes¹

HCL honeycomb louver (Cat. No. MOTO-MS2-SW-48-HCL)

NOTES

Complete fixture ordering code by adding accessory ordering code.
To order the accessory only use the catalog number.



