

MOTO-ZERO 68

2.5" Motorized Zoom Spot Standard White







FEATURES

- Two Motor Drive 90° Tilt and 350° Rotation.
- 15° 35° optical beam shaping.
- Motion, beam and dimming controlled by Casambi®.
- Black and white finishes available.

HOUSING

- Casted aluminum housing and integrated driver in adapter with black or white finish.

MOUNTING

- EVO muti-system track by stucchi

ELECTRICAL/CONTROLS

- Full Casambi control: dimming, motion and beam shaping.

- cCSAus Listed to UL1574 (track suitable for dry locations only)

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 60,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	мото	motorized track spot
TYPE	MZ2	2.5" motorized track zoom spot
LED	sw	standard white
DELIVERED LUMENS	10LM Standard Configu	920 Im rration: 3000K 80CRI
сст	30K 40K	3000K (1.00) 4000K (1.05)
CRI	90	90 CRI
VOLTAGE	48	48V
REFLECTOR	BS1	beam shaping 15° - 35, CBCP 13,300 - 9,400
DIMMING	CAS ¹	Casambi Bluetooth control with flicker free 1% dimming
FINISH	BK WH	black white
MOUNTING OPTIONS	MEVO	stucchi muti-system track
ACCESSORIES	See the las	t page for details.

ORDERING CODE

Follow the steps to specify your fixture, example: MOTO - MZ2 - SW - 10LM - 30K - 90 - 48 - BS1 - CAS - WH - MEVO

SW (LED)	POWER	
DELIVERED LM	W (80 CRI)	
920	17	


NOTES
1. Motion, dimming and beam shaping control by Casambi.




- 1	PROJECT INFORMATION			
	JOB NAME		TYPE	
	ORDERING CODE			


PHOTOMETRIC DATA


NO ACCESSORY

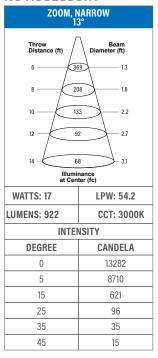

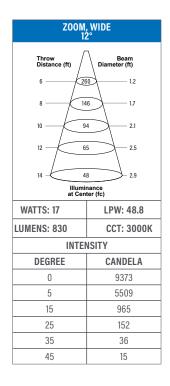

HCL

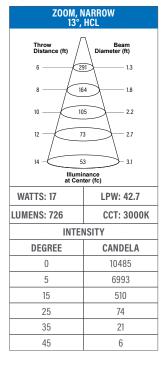


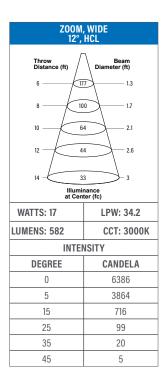



PROJECT INFOR		
JOB NAME	TYPE	
ORDERING CODE		

PRODUCT DIMENSIONS

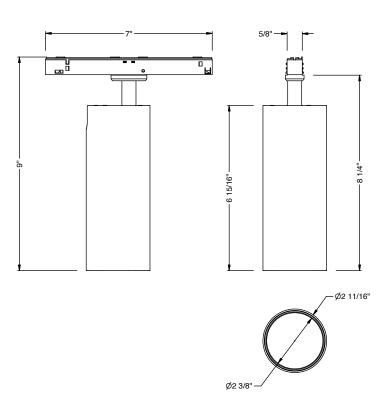

ACCESSORIES

Accessories Ordering Codes¹

honeycomb louver (Cat. No. MOTO-MZ2-48-HCL) HCL

NOTES

Complete fixture ordering code by adding accessory ordering code.
 To order the accessory only use the catalog number.

HONEYCOMB LOUVER



