

PROJECT INFORMATION					
JOB NAME		TYPE			
ORDERING CODE					

MSX WW

MEVO Stucchi Wall Wash Standard White



11" WALL WASH (Note: Specifications are subject to change without notice)					
CURRENT	SYSTEM WATTAGE				
250mA	300LM @30K/90CRI	5W			
350mA	400LM @30K/90CRI	7W			
500mA	600LM @30K/90CRI	10W			
700mA	850LM @30K/90CRI	14W			

22" GENERAL LIGHT (Note: Specifications are subject to change without notice)					
CURRENT NOMINAL DELIVERED LUMENS					
600LM @30K/90CRI	10W				
850LM @30K/90CRI	14W				
1200LM @30K/90CRI	19W				
1700LM @30K/90CRI	26W				
	NOMINAL DELIVERED LUMENS 600LM @30K/90CRI 850LM @30K/90CRI 1200LM @30K/90CRI				

Deep Regress Track

FEATURES

- Extruded aluminum housing with flat finish for clean aesthetics
- 13° reflector tilt for wall wash height control
- Mounting options include various STUCCHI track systems

DIMMING AND CONTROLS

• Flicker free 0-10V dimming to 0%

CONSTRUCTION

- Extruded aluminum housing
- Aluminum reflector

 Samsung (or equal) LED: SDCM: 2-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 66,000 hrs


LISTING

- CSAus Listed to UL1574; cCSA Listed to CSA C22.2 #9.0
- Suitable for dry and damp locations
- 5 Year Limited warranty

ELECTRICAL

- 48V (Casambi, 0-10V)
- Power factor ≥ 0.9
- 2kV driver input surge protection

WALL WASH

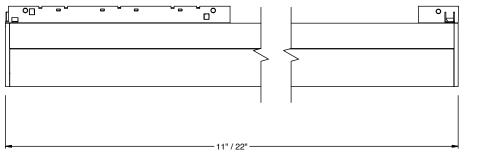





v.7.11.25

MSX WW



ORDERING CODE					
SERIES	MSXWW	MS			
LED	SW	standard white			
ССТ	30K	3000K (1.00)		
	35K	3500K (1.02)		
CRI	90	90 CRI			
SIZE	11	11" - 880lm, 14W			
SIZE	22	22" - 1900lm, 26W			
	250	250mA			
CURRENT	350	350mA			
CONNENT	500	500mA			
	700	700mA			

PROJECT INFORMATION				
JO	OB NAME		TYPE	
01	RDERING CODE			

	ORDERING CODE					
MOUNTING OPTIONS MEVO 48V stucchi multisystem track spot						
FINISH	BK	black				
LINIOU	WH	white				
VOLTAGE	48	48V				
DIMMING	DIM10Z	0-10V dim to zero				

YOUR COMPLETED ORDERI	NG CODE

MSXWW - SW - 30 - 90 - 22 - 500 - MEVO - BK - 48 - DIM10Z

Follow the steps to specify your fixture, example:

LUMENS - 3000K				WATTAGE				
SIZE	250mA	350mA	500mA	700mA	250mA	350mA	500mA	700mA
11"	300	400	600	850	5	7	10	14
22"	600	850	1200	1700	10	14	19	26

MOUNTING OPTIONS

