

PIAZZA


Outdoor Step Light IP65 Wall




PZ1 - PIAZZA 1



PZ2 - PIAZZA 2



BK-C BK-R



BK-C BK-R

FEATURES

- IP65
- 2 sizes; 5 1/2" & 9 7/8"
- Pre-finish anodizing process for corrosive-inhibiting protection
- Optional shade covers in concrete and rust
- 3000k & 4000k

HOUSING

- Casted aluminum housing in anthracite.

MOUNTING

- Mount to 3-1/2" to 4" octagonal recessed junction box.

ELECTRICAL/CONTROLS

- Integrated LED Module
- Non-dimmable

LISTING

- ETLus Listed to UL1598 (suitable for wet locations)
- cETL Listed to CSA C22.2 #250.0
- BUG Rating: B1 - U1 - G0
- 3000k or warmer must be selected for International Dark-Sky Association approval

LED INFO

- LED: Module SMD2835
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: $L_{70} > 50,000$ hrs
- Warranty: 5 year limited warranty


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE


SERIES	EXT	exterior	
TYPE	PZ1 PZ2	5-1/2", 5W - 120lm	9-7/8", 9W - 250lm
CCT	30K 40K	3000K	4000K
CRI	80	80 CRI	
VOLTAGE	UNV	120V-277V	
FINISH	BK BK-C BK-R	anthracite anthracite with shade - concrete finish anthracite with shade - rust finish	

Follow the steps to specify your fixture, example:
EXT - PZ1 - 30K - 80 - UNV - BK


*Wall mounting is recommended to be installed on a 4in deep regress 2-1/8" octagonal junction box.

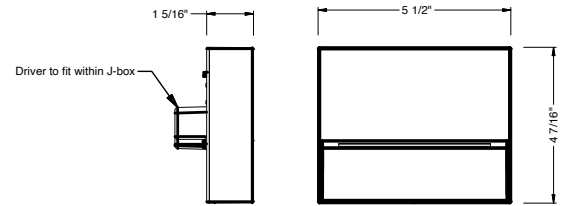


Piazza 1

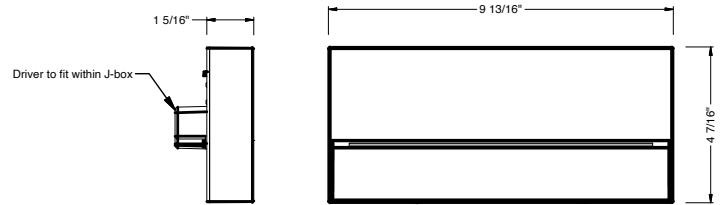

Piazza 2

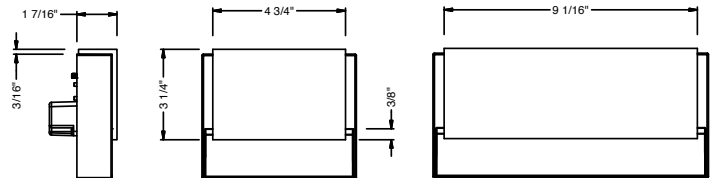

Rust Finish

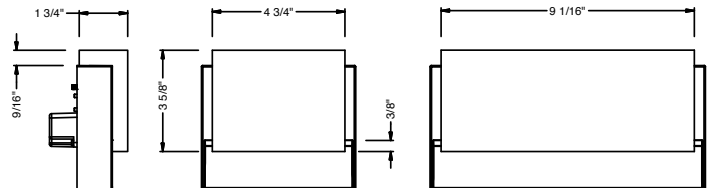

Concrete Finish

PIAZZA - 1

PIAZZA - 2