




JOB NAME		TYPE	
ORDERING CODE			

## MOUNTING OPTIONS

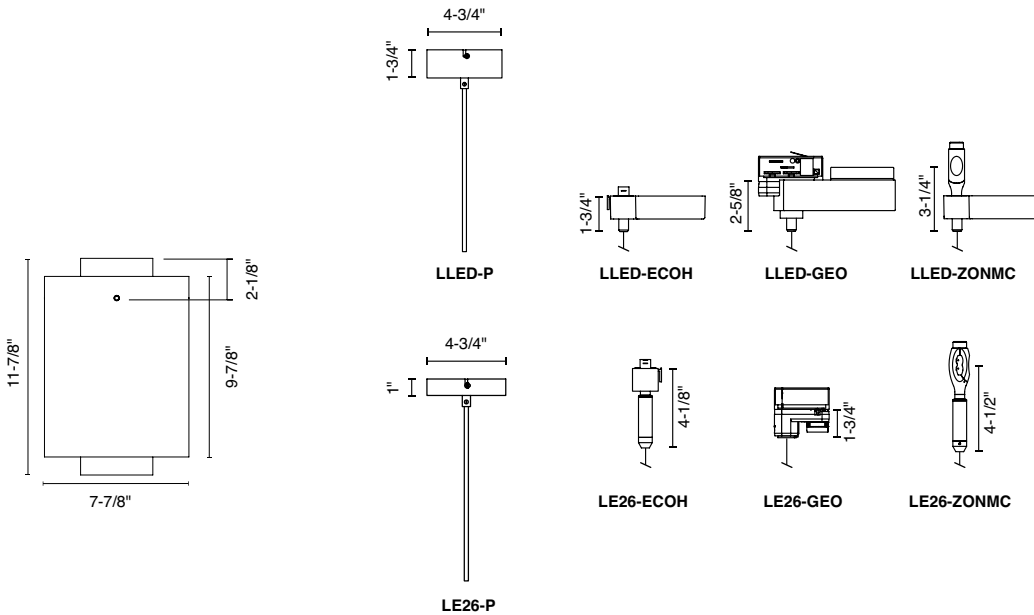

## LIGHT SOURCE

Light Source	LLED - Static White LED	LLED - Warm Dim LED	LE26 - E26 Socket
<b>Performance</b>			
LED	Cree CMT 1420	Luminus CDM-9	Lamp dependent
Lumens	1150lm	850lm	
CCT	3000K or 3500K	3000K to 1800K	
SDCM	2-Step MacAdam Ellipse	3-Step MacAdam Ellipse	
CRI	>90	>95	
Lumen Maintenance	L <sub>90</sub> > 41,500 hours	L <sub>70</sub> > 54,000 hours	
<b>Technical Specs</b>			
Socket Listing	<ul style="list-style-type: none"> <li>• Integrated LED module</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul>	<ul style="list-style-type: none"> <li>• Integrated LED module</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul>	<ul style="list-style-type: none"> <li>• Medium E26 base socket</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul>
<b>Mounting</b>			
Canopy	<ul style="list-style-type: none"> <li>• 120-277Vac, 50/60Hz input</li> <li>• 14.3W, 14.9VA</li> <li>• Tri-mode dimming (Triac, ELV and 0-10V)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>	<ul style="list-style-type: none"> <li>• 120-277Vac, 50/60Hz input</li> <li>• 15.6W, 16.1VA</li> <li>• Tri-mode dimming (Triac, ELV and 0-10V)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>	<ul style="list-style-type: none"> <li>• 120Vac input</li> <li>• 100W, 100VA (max 100W lamp)</li> <li>• Dimmable (with compatible lamp)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>
Line Voltage Track	<ul style="list-style-type: none"> <li>• 120Vac, 50/60Hz input</li> <li>• 14.3W, 14.9VA</li> <li>• Triac and ELV phase dimming</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul>	<ul style="list-style-type: none"> <li>• 120Vac, 50/60Hz input</li> <li>• 15.6W, 16.1VA</li> <li>• Triac and ELV phase dimming</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul>	<ul style="list-style-type: none"> <li>• 120Vac input</li> <li>• 100W, 100VA (max 100W lamp)</li> <li>• Dimmable (with compatible lamp)</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul>
<b>Warranty</b>			
	• 5 year limited fixture warranty	• 5 year limited fixture warranty	• 1 year limited fixture warranty

JOB NAME		TYPE	
ORDERING CODE			

## VINTAGE LED LAMPS FOR E26 BASE SOCKETS

- Amber Glass Lamp with Thread LED
- Integrated Driver-Free System
- Suitable for Damp Locations
- Smooth Dimming System\*
- 25,000 Hours Warranty
- 95% Energy Savings

\*Compatible with most electronic low voltage (ELV) dimmers



	LED Globe Lamp	LED Edison Lamp	LED Tubular Lamp
Ordering Code	LMP-G2518022K1	LMP-ED2118022K1	LMP-TB1030022K1
Type	G25	ST21	T10
Base	E26	E26	E26
Deliverd Lumens	350lm	200lm	350lm
Wattage	3.5W (60W equivalent)	2.0W (40W equivalent)	3.5W (60W equivalent)
Maximum Overall Length (MOL)	4.5"	5.4"	7.56"
Maximum Overall Diameter (MOD)	3.15"	2.45"	1.25"
CCT	2200K	2200K	2200K
	 	 	 