


SKYLINE

Outdoor / Indoor Catenary Fixture IP63
Standard White Down & Spot - Zoom

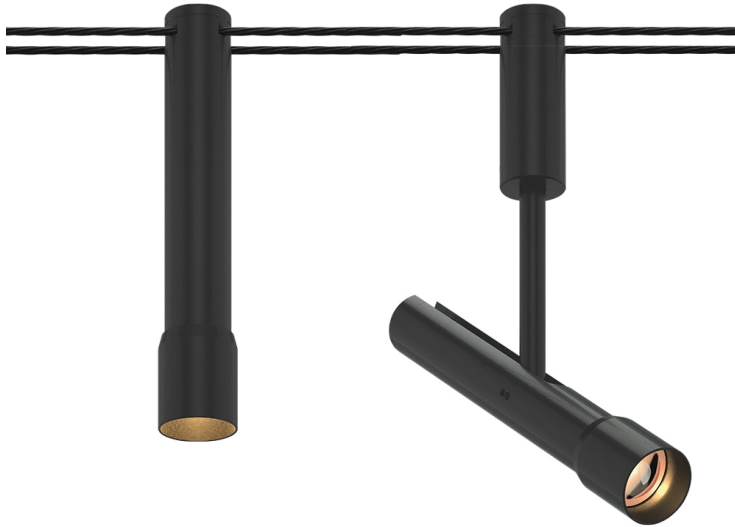

Down

Spot

DESCRIPTION

SKYLINE is a lightweight, highly versatile, and exceptionally elegant catenary system for indoor and outdoor applications. Up to 780 lumens from a 1" aperture cylinder. SKYLINE enables safe, reliable, clutter-free catenary on strong woven Kevlar, self-healing cable with marine grade, hard anodized aluminum fixture housings. Applications are endless, from outdoor gathering spaces to indoor accent lighting for retail and hospitality.

HOUSING

- Hard anodized, marine grade aluminum in matte black.
- Polycarbonate protective IK10 rated.
- Ambient operating temperatures Min. -40°F / Max 131°F.
- IP 63 rated Down and Spot.

MOUNTING

- Twin cable powered suspended catenary system

ELECTRICAL /CONTROLS

- 0-10V and DALI dimmable, see remote drivers for details.
- 24VDC input

LISTING

- ETLus listed to UL2108 (suitable for dry, damp and wet locations)
- cETL listed to CSA C22.2 #250.0

LED INFO

- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 100,000 hrs
- 80 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 100,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	EXT	exterior
TYPE	SKY-DZ SKY-SZ	skyline - down, zoom skyline - spot, zoom
LED	SW	standard white
DELIVERED LUMENS	10LM	780 lm
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	80 90	80 CRI 90 CRI
LENS OPTION	DZ1	dynamic zoom 10°-60°
VOLTAGE	24	24V
FINISH	BK	black

ORDERING CODE

Follow the steps to specify your fixture, example:

EXT - SKY - DZ - SW - 10LM - 30K - 90 - DZ1 - 24 - BK

SW (LED)	POWER	
DELIVERED LM	W (80/90 CRI)	LPW
780	10	78


EFFECTIVE PROJECTED AREA RATINGS (EPA)

SKYLINE CONFIGURATION	EPA (FT2)	WEIGHT - LBS. / OZ.
SKY-DZ	0.05997	0.280 / 4.48
SKY-SZ	0.086	0.325 / 5.20

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

PRODUCT DIMENSIONS

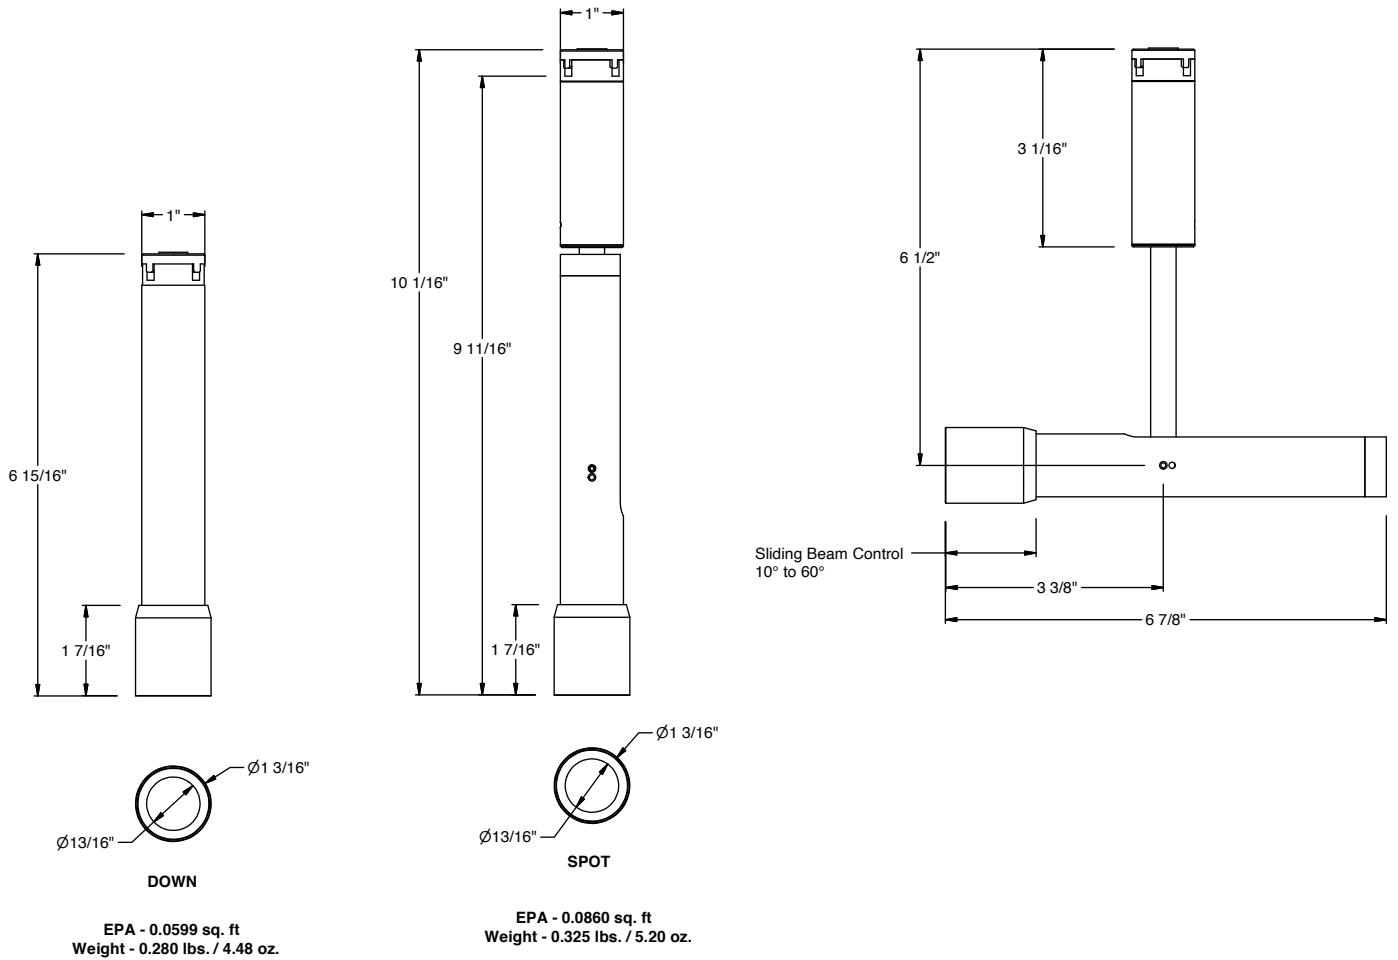

BEAM DISTRIBUTION

Dynamic Zoom

