

bruck

MATILDA ACOUSTIC

Canopy, Track LED E26



FEATURES

- Designed, handcrafted, and painted by Master Artisans
- Sustainable at every level. Made to order, eliminating waste
- 5 wood stains + 5 acoustic interiors + 13 colors options to mix & match
- Color finishes use water-based open-pore stains formulated with acrylic-methacrylic resins and UV-resistant pigments. Resistant to sunlight, humidity, mold, and water

SHADE

- Our reconstructed, recycled wood veneer is locally sourced and FSC®-certified, guaranteeing responsible forest management
- Our acoustic felt—made of 80% wool content and viscose—is certified to OEKO-TEX Standard 100 and ISO 9001, it's free from harmful substances, and is biodegradable.
- USA factory assembled shades with some exceptions due to size*
- Due to the hand-crafted nature, colors may vary from fixture to fixture and photo

MOUNTING

- Bayonet canopy with 108" cord, field adjustable
- Optional track mounting options: Global Trac Systems, GEO track, ECO track / HALO® track, and Zonyx track.
- Matilda 30: 1.2 lbs.
- Matilda 44: 2.3 lbs.
- Matilda 68: 3.7 lbs.

LISTING

- ULus listed to UL1598 (suitable for indoor use and dry locations only)
- cUL listed to CSA C22.2 #250.0

CCT AT LIGHT LEVEL (%LF) FOR WARM DIM LED	
%LF	CCT
100%	3000
50%	2800
25%	2300
10%	1900
5%	1800

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

ORDERING CODE

SERIES	WEP	wood shade
TYPE	MAT	matilda
SIZE	30 44 68	30 pendant, 1 x light source 44 pendant, 1 x light source 68 pendant, 1 x light source
LIGHT SOURCE	LE26 ¹ LLED	E26 socket LED, 1000 lm
CCT	30K 35K 3018	3000K, static white LED 3500K, static white LED 3000K, dim to 1800K, warm dim LED Not applicable to LE26 option. Do not include in LE26 ordering code.
CRI	90 ² 95 ³	90 CRI, static white 95 CRI, warm dim Not applicable for LE26 option. Do not include in LE26 ordering code.
MOUNTING OPTION	PBK PMC PWH ECOHBK ECOHWH ECOHMC ECOJBK ⁴ ECOJWH ⁴ ECOJMC ⁴ GEOBK GEOWH GEOMC ZONMC	canopy, black with black cable canopy, matte chrome with black cable canopy, white with white cable ECO/HALO black with black cable ECO/HALO white with white cable ECO/HALO matte chrome with black cable JUNO black with black cable JUNO white with white cable JUNO matte chrome with black cable GEO black with black cable GEO white with white cable GEO matte chrome with black cable Zonyx matte chrome with black cable
OUTER SHADE COLOR	ASH BCH BLK BLU EBY GRN GYO LPT OCH PGR PTB RED ROS TRC VLT WHT WNG YLW	ash beech black blue ebony green grey oak light petrol ocher pale green petiribi red rose teracotta violet white wenge yellow
ACOUSTIC INNER SHADE COLOR	ACTN ACTB ACTG ACTGN ACTRD	natural black grey green red

ORDERING CODE

Follow the steps to specify your fixture, example:

WEP - MAT - 68 - LLED - 3018 - 95 - PBK - GYO - ACTN

NOTES

1. 15W E26 socket available, use base option code LE26-15.
2. 90 CRI for static white only.
3. 95 CRI for warm dimming only.
4. Not available with LLED.

COLOR OPTIONS

Grey Oak GYO	Ebony EBY	Wenge WNG	Petiribi PTB	Beech BCH	Ash ASH
Green GRN	Yellow YLW	Red RED	White WHT	Blue BLU	Pale Green PGR
Light Petrol LPT	Ocher OCH	Teracotta TRC	Rose ROS	Violet VLT	Black BLK

ACOUSTIC COLOR OPTIONS


Natural ACTN	Black ACTB	Grey ACTG	Red ACTRD	Green ACTGN

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

LIGHT SOURCE


Light Source	LLED - Static White LED	LLED - Warm Dim LED	LE26 - E26 Socket
Performance			
LED	Cree CMT 1420	Luminus CDM-9	Lamp Dependant
Lumens	1150 lm	850 lm	
CCT	3000K or 3500K	3000K to 1800K	
SDCM	2-Step MacAdam Ellipse	3-Step MacAdam Ellipse	
CRI	>90	>95	
Lumen Maintenance	L ₉₀ > 41,500 hours	L ₇₀ > 54,000 hours	
Technical Specs			
Socket Listing	Integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0	Integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0	Medium E26 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting			
Canopy	120-277Vac, 50/60Hz input 14.3W, 14.9VA Tri-mode dimming (Triac, ELV and 0-10V)	120-277Vac, 50/60Hz input 15.6W, 16.1VA Tri-mode dimming (Triac, ELV and 0-10V)	120Vac input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp)
Line Voltage Track	120Vac, 50/60Hz input 14.3W, 14.9VA Triac and ELV phase dimming Connects to line voltage adapter (ECOH, GEO, Zonyx)	120Vac, 50/60Hz input 15.6W, 16.1VA Triac and ELV phase dimming Connects to line voltage adapter (ECOH, GEO, Zonyx)	120Vac input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECOH, ECOJ, GEO, Zonyx)
Warranty			
	5 year limited fixture warranty	5 year limited fixture warranty	1 year limited fixture warranty

WARM DIM DIMMING CURVE
CCT RANGE: 3000K TO 1800K

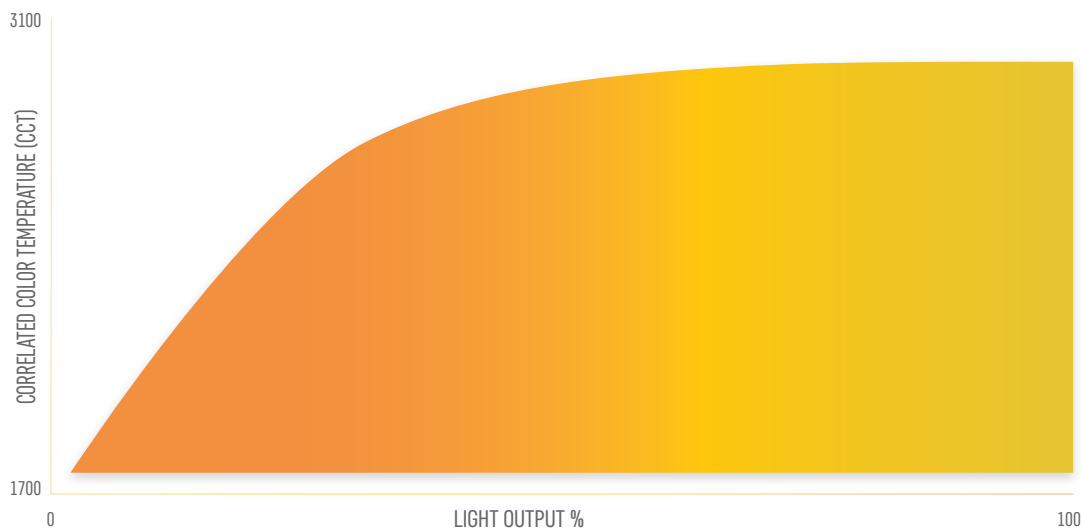


PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		


MOUNTING OPTIONS




MATILDA ACOUSTIC 30
LE26




D 11-7/8"




MATILDA ACOUSTIC 30
LLED

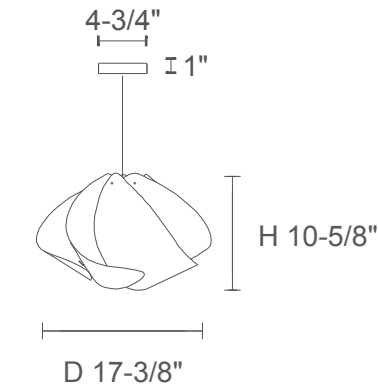


MATILDA ACOUSTIC 44
LE26

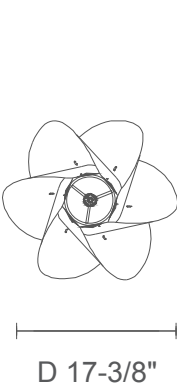


D 17-3/8"

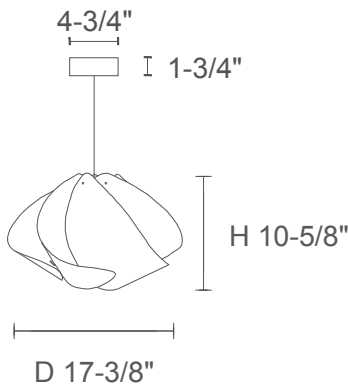


MATILDA ACOUSTIC 44
LLED

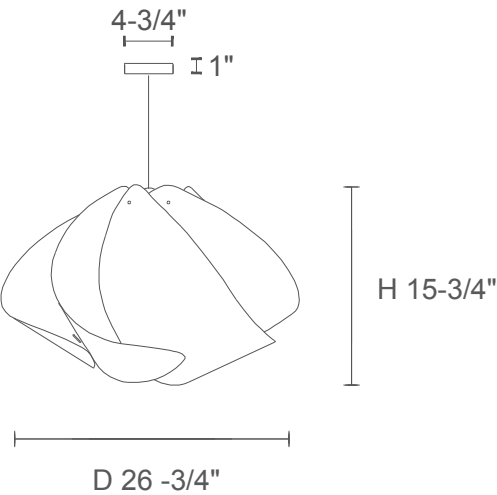

MATILDA ACOUSTIC 68
LE26

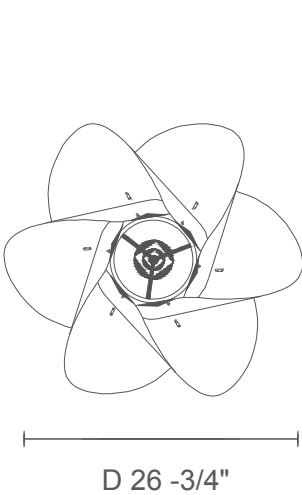


D 26 -3/4"

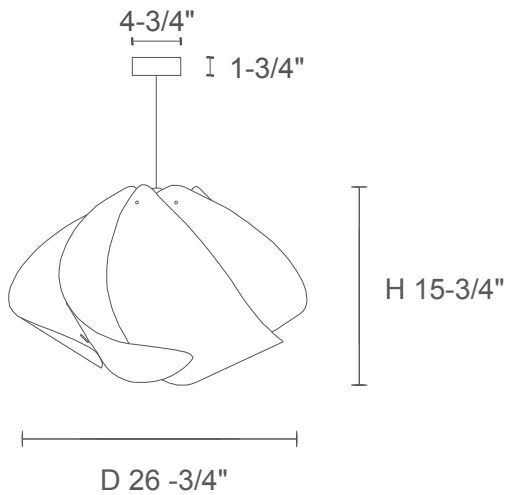


MATILDA ACOUSTIC 68
LLED

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS




LLED-ECOH




LLED-GEO




LLED-ZONMC



LE26-ECOH/ECOJ



LE26-GEO



LE26-ZONYX