

RENATA OVAL

Canopy **SW WD E26**





DESCRIPTION

- WEP Light (Wood Ecological Project) is designed, handcrafted in Argentina and assembled in the USA. A two-sided wood veneer section is fused with a malleable center panel for strength and flexibility to create a work of art in a variety of styles and sizes. A plethora of colors for interior and exterior of the shade are offered. Acoustic WEP lights are offered in multiple shapes and sizes and are NRC rated by a third-party lab for absorption efficiency. The natural recycled wood in many finish options, is complimented by a natural Argentinian lamb's wool inner shade for superior absorption. Factory assembly for most shades.
- Due to hand-crafted nature, colors vary from fixture to fixture and from photo.

HOUSING

- Sustainable, recycled, reconstructed wood veneer
- Factory assembled shades with some exceptions due to size

MOUNTING

- Renata 116: Bayonet canopy with 108" cord, field adjustable
- Renata 80, 145 & 200: Air craft cable suspension with canopy and 108" cord, field adjustable.
- Renata 800VL: 5.73 lbs.
- Renata 1160VL: 8.28 lbs.
- Renata 1450VL: 12.5 lbs.

LISTING

- ULus listed to UL1598 (suitable for indoor use and dry locations only)
- cUL listed to CSA C22.2 #250.0

CCT AT LIGHT LEVEL (%LF) FOR WARM DIM LED		
%LF	ССТ	
100%	3000	
50%	2800	
25%	2300	
10%	1900	

1800

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

ORDERING CODE			
SERIES	WEP	wood shade	
TYPE	REN	renata	
SIZE	800VL ¹ 1160VL 1450VL ^{2,3}	80 oval pendant, 2 x light source 116 oval pendant, 3 x light source 145 oval pendant, 4 x light source	
LIGHT SOURCE	LE26 ⁴ LLED	E26 socket LED, 1000 lm	
сст	30K 35K 3018 Not applicable to	3000K, standard white LED 3500K, standard white LED 3000K, dim to 1800K, warm dim LLED o LE26 option. Do not include in LE26 ordering code.	
CRI	90 ⁵ 95 ⁶	90 CRI, standard white 95 CRI, warm dim	
MOUNTING OPTION	PBK PMC PWH	canopy, black with black cable canopy, matte chrome with black cable canopy, white with white cable	
OUTER SHADE COLOR	ASH BCH BLU EBY GRN GYO OCH PGR PTB RED ROS TRC WHT WNG YLW LPT VLT	ash beech blue ebony green grey oak ocher pale green petiribi red rose teracotta white wenge yellow light petrol violet	
INNER SHADE COLOR	ASH BCH BLU EBY GRN GYO OCH PGR PTB RED ROS TRC WHT WNG YLW LPT VLT	ash beech blue ebony green grey oak ocher pale green petiribi red rose teracotta white wenge yellow light petrol violet	

ORDERING CODE

Follow the steps to specify your fixture, example: WEP - REN - 1160VL - LE26 - PBK - ASH - ASH

- NOTES

 1. 800VL offered in PBK and PWH mount only when ordered with LE26.
 2. 1450VL offered in PBK and PWH mount only.
 3. Assembly required.
 4. 15W E26 socket available, use base option code LE26-15.

- 90 CRI for standard white only.95 CRI for warm dimming only.





PROJECT INFORMATION				
JOB NAME		TYPE		
ORDERING CODE				


LIGHT SOURCE

Light Source	LLED - Static White LED	LLED - Warm Dim LED	LE26 - E26 Socket
Performance			
LED	Cree CMT 1420	Luminus CDM-9	Lamp Dependant
Lumens	1150 lm	850 lm	
CCT	3000K or 3500K	3000K to 1800K	
SDCM	2-Step MacAdam Ellipse	3-Step MacAdam Ellipse	
CRI	>90	>95	
Lumen Maintenance	L ₉₀ > 41,500 hours	L ₇₀ > 54,000 hours	
Technical Specs	1		
·			
Socket Listing	Integrated LED module	Integrated LED module	Medium E26 base socket
	ETLus Listed to UL1598	ETLus Listed to UL1598	ETLus Listed to UL1598
	(Suitable for dry locations only)	(Suitable for dry locations only)	(Suitable for dry locations only)
	cETL Listed to CSA C22.2 #250.0	cETL Listed to CSA C22.2 #250.0	cETL Listed to CSA C22.2 #250.0
Mounting			
Canopy	120-277Vac, 50/60Hz input	120-277Vac, 50/60Hz input	120Vac input
	14.3W, 14.9VA	15.6W, 16.1VA	100W, 100VA (max 100W lamp)
	Tri-mode dimming (Triac, ELV and 0-10V)	Tri-mode dimming (Triac, ELV and 0-10V)	Dimmable (with compatible lamp)
Warranty			
	5 year limited fixture warranty	5 year limited fixture warranty	1 year limited fixture warranty




PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS

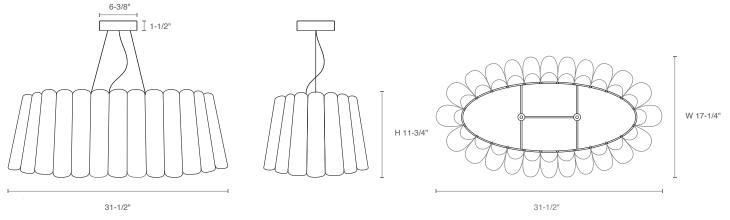

RENATA 80 OVL

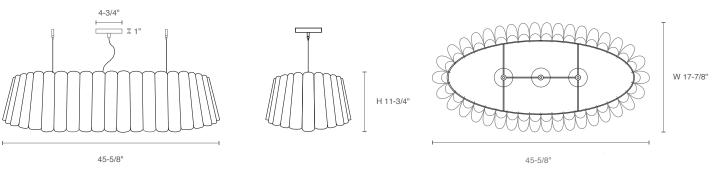

RENATA 116 OVL

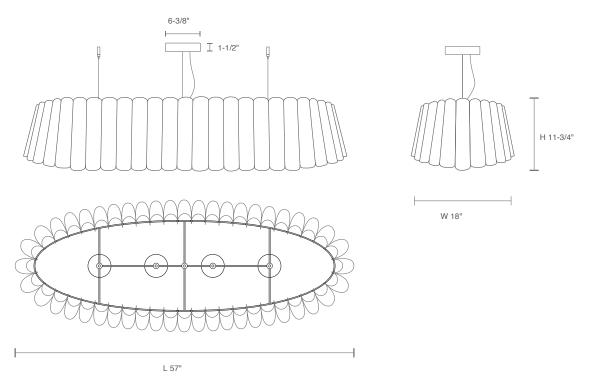


RENATA 145 OVL

Page 3 of 4





PROJECT INFOR	MATION		
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS

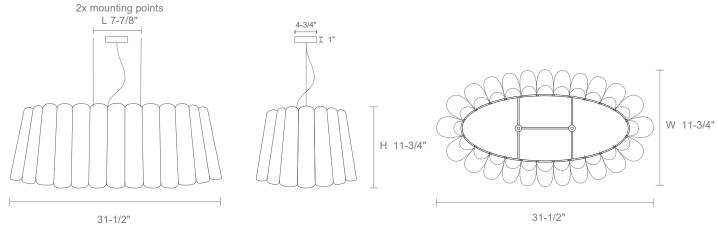

RENATA 145 OVL LLED

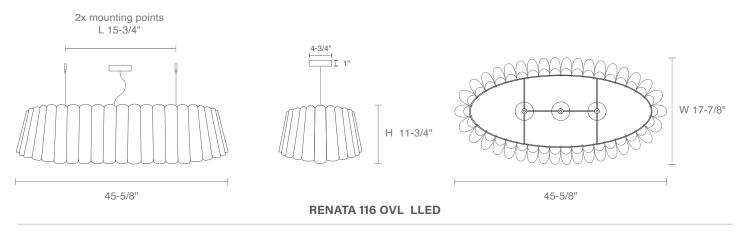

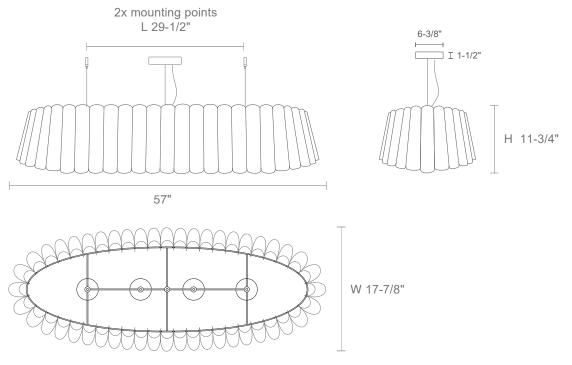

RENATA 80 OVL LLED