

## Z15

### LED Canopy Spot Xicato

#### XICATO



BK



WH

#### DESCRIPTION

Z15 is a performance spot fixture in a par20 cylinder form factor integrated with industry best LEDs up to 1470 lm. Z15 has many options for most applications and carries the first 5 Year NO COLOR SHIFT AND FIXTURE WARRANTY.

#### HOUSING

Extruded aluminum housing with white, matte chrome or black finish

#### MOUNTING

- Canopy over a 3-1/2" to 4" recessed octagonal junction box for MP mounting option

#### LISTINGS

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- cETL Listed to CSA C22.2 #250.0
- Made in the USA - meets the requirements of the Buy American provision within the ARRA

#### LED INFO

- XICATO XTM:
- SDCM = 1x2 MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L<sub>90</sub> > 55,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

#### XICATO XTM MODULE - ORDERING CODES

PART NUMBER	137420		
LED	XTM19	XICATO XTM 19mm	
DELIVERED LUMENS	11LM	835 lm	
	13LM	950 lm	
	16LM	1160 lm	
	20LM <sup>1</sup>	1470 lm	
	Standard Configuration: 3000K 83CRI SA20		
CCT	27K	2700K	
	30K	3000K	
	35K	3500K	
	40K	4000K	
CRI	83	83 CRI	
	98	98 CRI	
REFLECTOR & LUMEN MULTIPLIER	SA20	20° specular (1.00)	
	SA40	40° specular (1.00)	
	SA60	60° specular (0.99)	
	SSA20	20° semi-specular (0.92)	
	SSA40	40° semi-specular (0.82)	
	SSA60	60° semi-specular (0.93)	
	DA20	20° diffused (0.86)	
	DA40	40° diffused (0.88)	
	DA60	60° diffused (0.89)	
	10° narrow beam angle, see page 2 for details.		
VOLTAGE	120 UNV	120V	120V-277V
DIMMING	ELV <sup>2</sup>	10% trailing edge dimming	
	10V <sup>3</sup>	0-10V dimming to 10%	
	See Dimming Availability Chart at the bottom of this page for details.		
FINISH	BK	black	
	WH	white	
	MC	matte chrome	
MOUNTING OPTIONS	MP	monopoint canopy	
STEM LENGTH	5	5" stem	
	28 <sup>4</sup>	28" stem	
	48 <sup>4,5</sup>	48" stem	
	60 <sup>4,5</sup>	60" stem	
	72 <sup>4,5</sup>	72" stem	
	96 <sup>4,5</sup>	96" stem	
	120 <sup>4,5</sup>	120" stem	
LITE OPTICS	CLR	standard snoot / lens	

#### ORDERING CODE

Follow the steps to specify your fixture, example:

137420 - XTM19 - 20LM - 35K - 83 - SSA20 - 120 - ELV - MC - MP - 28 - CLR

XTM19 (LED)	POWER		DIMMING AVAILABILITY		
	DELIVERED LM	W (83 CRI)	W (98 CRI)	ELV	10V
835	13	14	11LM 83	•	
950	15	17	11LM 98	•	
1160	16	18	13LM 83	•	•
1470	18	N/A	13LM 98		•
			16LM 83	•	•
			16LM 98	•	•
			20LM 83	•	•
			20LM 98		

#### NOTES

1. 20LM not available in 98CRI.
2. ELV dimming only available in 120V.
3. 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
4. Field cuttable to specific length; length may be specified in 1" increments at additional charge.
5. Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## 10° NARROW BEAM - ORDERING CODES

<b>PART NUMBER</b>	137420	
<b>LED</b>	XTM09	XICATO XTM 9mm
<b>DELIVERED LUMENS</b>	12LM	900 lm
<b>CCT</b>	27K 30K 35K 40K	2700K 3000K 3500K 4000K
<b>CRI</b>	83	83 CRI
<b>REFLECTOR</b>	SA10	10° specular
<b>VOLTAGE</b>	120 UNV	120V 120V-277V
<b>DIMMING</b>	ELV <sup>1</sup> 10V <sup>2</sup>	10% trailing edge dimming 0-10V dimming to 10%
<b>FINISH</b>	BK WH MC	black white matte chrome
<b>MOUNTING OPTIONS</b>	MP	monopoint canopy
<b>STEM LENGTH</b>	5 28 <sup>3</sup> 48 <sup>3,4</sup> 60 <sup>3,4</sup> 72 <sup>3,4</sup> 96 <sup>3,4</sup> 120 <sup>3,4</sup>	5" stem 28" stem 48" stem 60" stem 72" stem 96" stem 120" stem
<b>LITE OPTICS</b>	CLR	standard snoot / lens

### ORDERING CODE

Follow the steps to specify your fixture, example:

137420 - XTM09 - 12LM - 35K - 83 - SA10 - 120 - ELV - BK - MP - 28 - CLR

XTM09 (LED)	POWER
DELIVERED LM	W (83 CRI)
900	16

Power Factor ≥ 0.9

### NOTES

1. ELV dimming only available in 120V.
2. 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
3. Field cuttable to specific length; length may be specified in 1" increments at additional charge.
4. Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

**PROJECT INFORMATION**


JOB NAME		TYPE	
ORDERING CODE			

**MOUNTING OPTIONS**


**Mounting Options**

**MP** monopoint canopy


- H**
- 5 5" stem
  - 28 28" stem (field adjustable to 6")
  - 48 48" stem (field adjustable to 6")
  - 60 60" stem (field adjustable to 6")
  - 72 72" stem (field adjustable to 6")
  - 96 96" stem (field adjustable to 54")
  - 120 120" stem (field adjustable to 66")

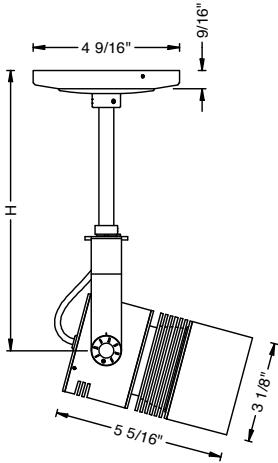

ELV  
Stem Lengths of 5 and 28

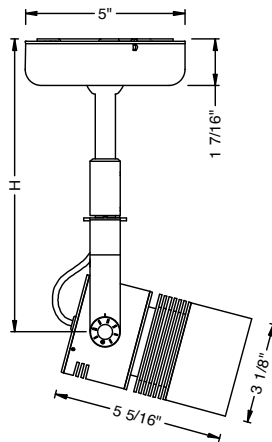

ELV  
Stem Lengths of 48 thru 120

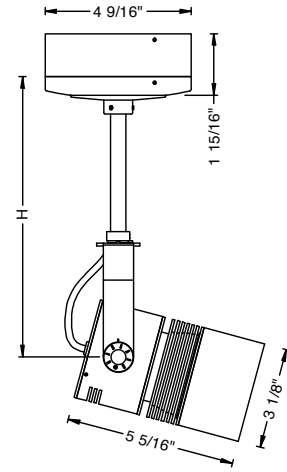

10V  
Stem Lengths of 5 and 28