

Z15

LED Canopy Spot Xicato

XICATO



BK



WH

DESCRIPTION

Z15 is a performance spot fixture in a par20 cylinder form factor integrated with industry best LEDs up to 1470 lm. Z15 has many options for most applications and carries the first 5 Year NO COLOR SHIFT AND FIXTURE WARRANTY.

HOUSING

Extruded aluminum housing with white, matte chrome or black finish

MOUNTING

- Canopy over a 3-1/2" to 4" recessed octagonal junction box for MP mounting option

LISTINGS

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- cETL Listed to CSA C22.2 #250.0
- Made in the USA - meets the requirements of the Buy American provision within the ARRA

LED INFO

- XICATO XTM:
- SDCM = 1x2 MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L90 > 55,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

XICATO XTM MODULE - ORDERING CODES

PART NUMBER	137420	
LED	XTM19	XICATO XTM 19mm
DELIVERED LUMENS	11LM 835 lm 13LM 950 lm 16LM 1160 lm 20LM ¹ 1470 lm	Standard Configuration: 3000K 83CRI SA20
CCT	27K 2700K 30K 3000K 35K 3500K 40K 4000K	
CRI	83 83 CRI 98 98 CRI	
REFLECTOR & LUMEN MULTIPLIER	SSA20 20° semi-specular (0.92) SSA40 40° semi-specular (0.82) SSA60 60° semi-specular (0.93) SA20 20° specular (1.00) SA40 40° specular (1.00) SA60 60° specular (0.99) DA20 20° diffused (0.86) DA40 40° diffused (0.88) DA60 60° diffused (0.89)	
VOLTAGE	120 UNV	120V 120V-277V
DIMMING	ELV ² 10V ³	10% trailing edge dimming 0-10V dimming to 10% See Dimming Availability Chart at the bottom of this page for details.
FINISH	BK WH MC	black white matte chrome
MOUNTING OPTIONS	MP	monopoint canopy
STEM LENGTH	5 28 ⁴ 48 ^{4,5} 60 ^{4,5} 72 ^{4,5} 96 ^{4,5} 120 ^{4,5}	5" stem 28" stem 48" stem 60" stem 72" stem 96" stem 120" stem
LITE OPTICS	CLR	standard snoot / lens

ORDERING CODE

Follow the steps to specify your fixture, example:
137420 - XTM19 - 20LM - 35K - 83 - SSA20 - 120 - ELV - MC - MP - 28 - CLR

XTM19 (LED)	POWER		DIMMING AVAILABILITY		
	DELIVERED LM	W (83 CRI)	W (98 CRI)	ELV	10V
835	13	14	11LM 83	•	
950	15	17	11LM 98	•	
1160	16	18	13LM 83	•	•
1470	18	N/A	13LM 98		•
			16LM 83	•	•
			16LM 98	•	•
			20LM 83	•	•
			20LM 98		

Power Factor ≥ 0.9

NOTES

- 20LM not available in 98CRI.
- ELV dimming only available in 120V.
- 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
- Field cuttable to specific length; length may be specified in 1" increments at additional charge.
- Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

PROJECT INFORMATION


JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS


Mounting Options

MP monopoint canopy


- H
- 5 5" stem
 - 28 28" stem (field adjustable to 6")
 - 48 48" stem (field adjustable to 6")
 - 60 60" stem (field adjustable to 6")
 - 72 72" stem (field adjustable to 6")
 - 96 96" stem (field adjustable to 54")
 - 120 120" stem (field adjustable to 66")

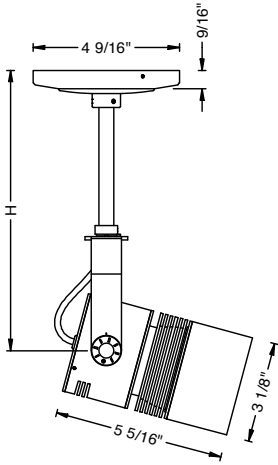

ELV
Stem Lengths of 5 and 28

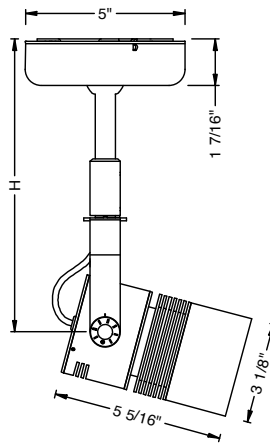

ELV
Stem Lengths of 48 thru 120

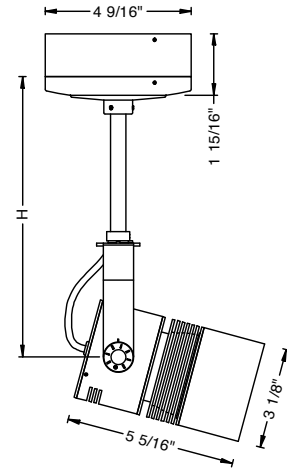

10V
Stem Lengths of 5 and 28