

## JAZZ

### Pendant Round



#### FEATURES

- Multiple lumen packages available
- Offered in 16", 24", and 36" sizes
- Direct and Indirect light outputs
- Wide variety of canopy and housing finish options available

#### CONSTRUCTION

- Slim 2" aluminum luminaire
- Robust casted aluminum mounting hardware
- High-tension stainless-steel aircraft suspension cables

#### ELECTRICAL/CONTROLS

- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 1.0%

#### LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

#### LED INFO

- SAMSUNG LM281B+ LED: CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>80</sub> > 50,000 hrs

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

#### ORDERING CODE

SERIES	JAZZ-P	jazz pendant
TYPE	RD	round
SIZE	16 24 36	D 16" D 24" D 36"
LIGHT OUTPUT	D DI	direct only direct/indirect
CURRENT	500 700 900	500mA 700mA 900mA
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	90	90 CRI
HOUSING FINISH	<b>STANDARD</b> BK black WH white GY grey  <b>SPECIALTY</b> AN anthracite BB berry blue BL blue BZ bronze CP copper CR creme FO forest GD gold HG highland green ML merlot SP sepia TR terra CC <sup>1</sup> custom color, consult factory for details	
CANOPY FINISH	<b>STANDARD</b> BK black WH white GY grey  <b>SPECIALTY</b> AN anthracite BB berry blue BL blue BZ bronze CP copper CR creme FO forest GD gold HG highland green ML merlot SP sepia TR terra CC <sup>1</sup> custom color, consult factory for details	
DIMMING	UNV-DIM10	120V-277V integrated driver, flicker free 0-10V dimming to 1%

#### ORDERING CODE

Follow the steps to specify your fixture, example:


**JAZZ - P - RD - 24 - DI - 700 - 30K - 90 - BK - BK - UNV - DIM10**

#### NOTES

1. Custom set up fee plus minimum quantity required per color.

DIRECT (3000K)				INDIRECT (3000K)			
SIZE	500mA	700mA	900mA	SIZE	500mA	700mA	900mA
16"	1100lm / 11W	1530lm / 15W	1960lm / 19W	16"	408lm / 4W	564lm / 5W	724lm / 5W
24"	2580lm / 24W	3570lm / 31W	4580lm / 39W	24"	816lm / 5W	1128lm / 8W	1448lm / 10W
36"	5910lm / 49W	8170lm / 68W	9900lm / 83W	36"	1632lm / 12W	2257lm / 17W	2733lm / 20W

#### COLOR OPTIONS

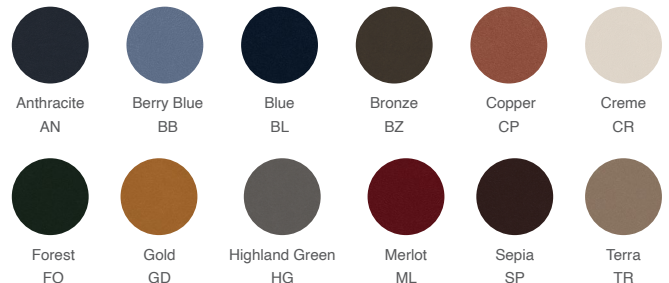

## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## PRODUCT DIMENSIONS

