

JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## GX35 Spot Fixture SMARTTrack



### DESCRIPTION

The SMARTTrack GX35 is a spot fixture with 3450lm at 90+ CRI. It features optional lens and glare reduction accessories. It is offered in black or white matte finish.

### HOUSING

- Extruded aluminum housing with black or white finish.

### MOUNTING

- 48Vdc SMARTTrack systems  
- 350° rotation, 90° tilt

### ELECTRICAL/CONTROLS

- 48Vdc input (+/- 5%), 36W  
- 0-10V hardwire control with dim to off using SMARTTrack data bus

### LISTINGS

- ETLus Listed to UL1574 (track suitable for dry locations only)  
- cETL Listed to CSA C22.2 #9.0

### LED INFO

LED: Luminus CXM-18  
- SDCM: 3-step MacAdam Ellipse  
- Lumen Maintenance:  $L_{70} > 60,500$  hrs


### ORDERING CODE

<b>PART NUMBER</b>	350442	
<b>DELIVERED LUMENS</b>	40LM	3450 lm <small>Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier]</small>
<b>CCT &amp; LM MULTIPLIER</b>	30K 35K	3000K (1.00) 3500K (1.02)
<b>CRI</b>	90	90 CRI
<b>OPTICS &amp; LM MULTIPLIER</b>	20 38 50	20° (1.13) 38° (1.14) 50° (1.00)
<b>VOLTAGE</b>	48	48V
<b>DIMMING</b>	10V	0-10V dimming to 5%
<b>FINISH</b>	WH BK	white black
<b>MOUNTING OPTIONS</b>	SMT	SMARTTrack monopoint
<b>ACCESSORIES</b>	See page 2 for details.	

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
350442 - 40LM - 30K - 90 - 50 - 48 - 10V - WH - SMT

## MOUNTING OPTIONS

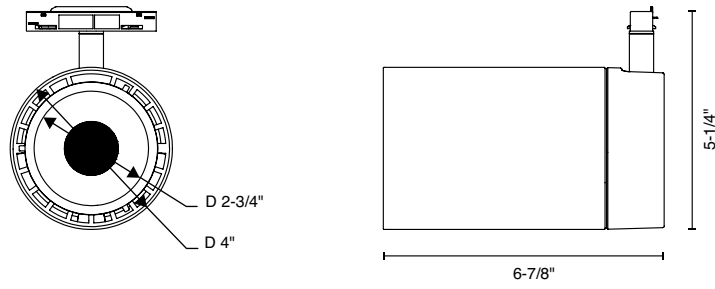




**SMT MONOPOINT**

## ACCESSORIES

Follow the steps to specify your fixture, example:  
**350442 - 40LM - 30K - 90 - 50 - 48 - 10V - WH - SMT - 350442/SNOOTBK**

- Accessories**
- 350442/SNOOTBK snoot, black
  - 350442/SNOOTWH snoot, white
  - 350442/HCLBK honeycomb louver, black
  - 350442/HCLWH honeycomb louver, white

## SNOOT

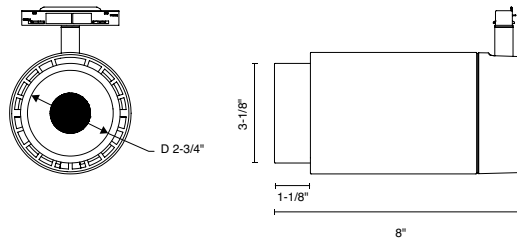

## HONEYCOMB LOUVER

