


## RENATA ACOUSTIC

Canopy  
SW WD E26

WEPLIGHT  
COLLECTION

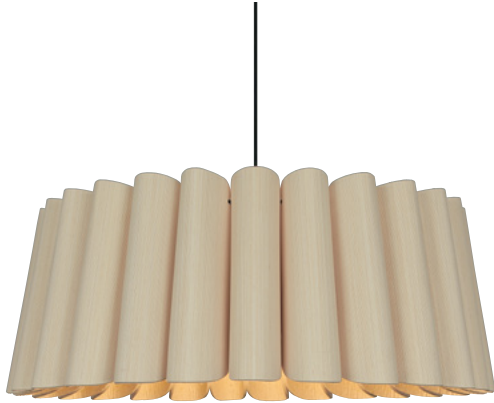

### FEATURES

- Designed, handcrafted, and painted by Master Artisans
- Made to order, eliminating waste
- 6 wood stains + 11 colors to mix & match
- Natural lamb's wool acoustic material is NRC-rated for absorption efficiency
- Traditional E26 socket or range of LED options. 3000K, 3500K, & Warm Dim 3000K, dim to 1800K

### HOUSING

- Composed of recycled, locally sourced reconstructed wood veneer
- USA factory assembled shades with some exceptions due to size
- Due to hand-crafted nature, colors may vary from fixture to fixture and from photo

### MOUNTING

- Aircraft cable suspension with black or white canopy and with 108" black or white cord, field adjustable
- Renata 80: 8 lbs.
- Renata 116: 17 lbs.

### LISTING

- ULus listed to UL1598 (suitable for indoor use and dry locations only)
- cUL listed to CSA C22.2 #250.0
- Acoustical testing at a NVLAP Lab per ASTM C423 and ASTM E795 standards

#### CCT AT LIGHT LEVEL (%LF) FOR WARM DIM LED

%LF	CCT
100%	3000
50%	2800
25%	2300
10%	1900
5%	1800

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

### ORDERING CODE

SERIES	WEP	wood shade
TYPE	REN	renata
SIZE	80 116	80 pendant, 1 x light source 116 pendant, 3 x light source
LIGHT SOURCE	LE26 <sup>1</sup> LLED	E26 socket LED, 1000 lm
CCT	30K 35K 3018	3000K, standard white LED 3500K, standard white LED 3000K, dim to 1800K, warm dim LED Not applicable to LE26 option. Do not include in LE26 ordering code.
CRI	90 <sup>2</sup> 95 <sup>3</sup>	90 CRI, standard white 95 CRI, warm dim Not applicable to LE26 option. Do not include in LE26 ordering code.
MOUNTING OPTION	PBK PWH	canopy, black with black cable canopy, white with white cable
OUTER SHADE COLOR	ASH BCH BLU EBY GRN GYO OCH PGR PTB RED ROS TRC WHT WNG YLW LPT VLT	ash beech blue ebony green grey oak ocher pale green petribi red rose teracotta white wenge yellow light petrol violet
ACOUSTIC INNER SHADE COLOR	ACTN ACTB ACTG ACTRD ACTGN	natural black grey red green

### ORDERING CODE

Follow the steps to specify your fixture, example:  
**WEP - REN - 80 - LLED - 35K - 90 - PBK - PTB - ACTN**


#### NOTES

1. 15W E26 socket available, use base option code LE26-15.
2. 90 CRI for standard white only.
3. 95 CRI for warm dimming only.

### COLOR OPTIONS



### ACOUSTIC COLOR OPTIONS




PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## LIGHT SOURCE

Light Source	LLED - Static White LED	LLED - Warm Dim LED	LE26 - E26 Socket
<b>Performance</b>			
LED	Cree CMT 1420	Luminus CDM-9	Lamp Dependant
Lumens	1150 lm	850 lm	
CCT	3000K or 3500K	3000K to 1800K	
SDCM	2-Step MacAdam Ellipse	3-Step MacAdam Ellipse	
CRI	>90	>95	
Lumen Maintenance	L <sub>90</sub> > 41,500 hours	L <sub>70</sub> > 54,000 hours	
<b>Technical Specs</b>			
Socket Listing	Integrated LED module ETLus Listed to UL1598 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0	Integrated LED module ETLus Listed to UL1598 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0	Medium E26 base socket ETLus Listed to UL1598 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0
<b>Mounting</b>			
Canopy	120-277Vac, 50/60Hz input 14.3W, 14.9VA Tri-mode dimming (Triac, ELV and 0-10V)	120-277Vac, 50/60Hz input 15.6W, 16.1VA Tri-mode dimming (Triac, ELV and 0-10V)	120Vac input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp)
<b>Warranty</b>			
	5 year limited fixture warranty	5 year limited fixture warranty	1 year limited fixture warranty



## MOUNTING OPTIONS

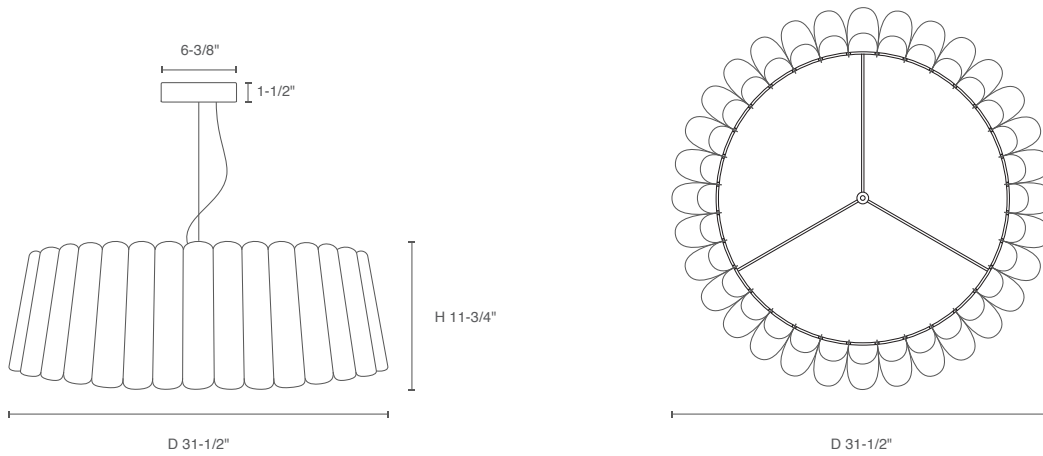



**RENATA 80 ACOUSTIC**

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

## MOUNTING OPTIONS

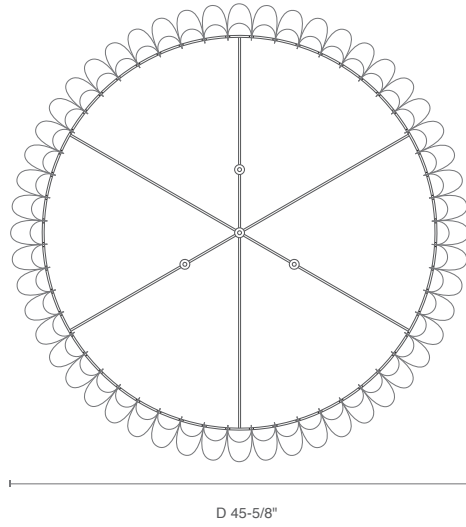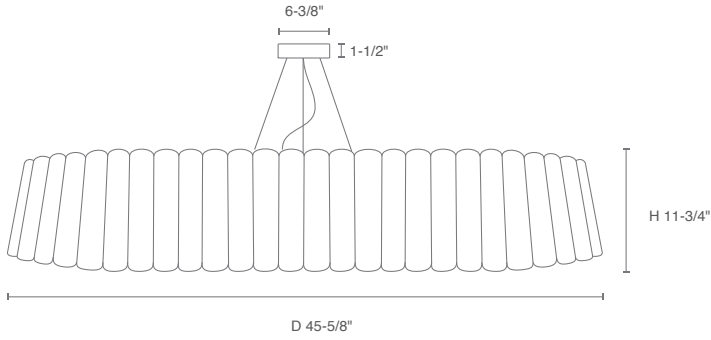

**RENATA 116 ACOUSTIC**

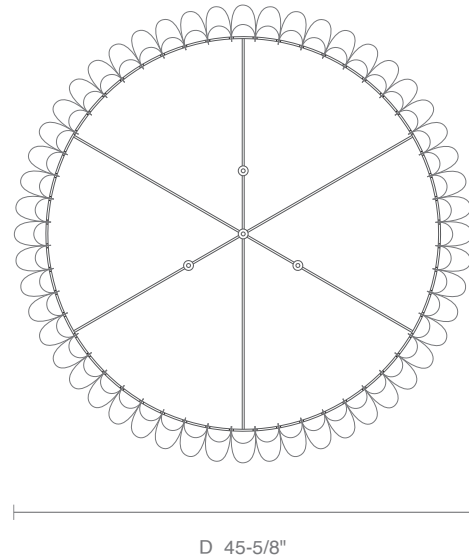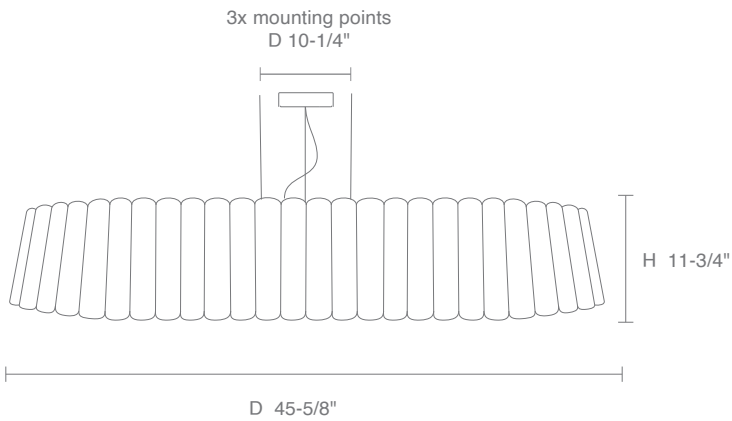

**RENATA 116 LED ACOUSTIC**

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## SABINS PER FIXTURE

Sabins per fixture: Equivalent square feet of perfect absorption

SABINS		
CENTER FREQUENCY (HZ)	RENATA 80	RENATA 116
100	1.10	0.63
125	0.94	0.26
160	1.17	-1.43
200	1.38	1.69
250	1.63	2.01
315	2.24	3.85
400	1.64	2.31
500	2.29	2.96
630	3.15	4.78
800	3.47	4.91
1000	3.52	5.30
1250	5.23	7.17
1600	5.61	8.78
2000	6.21	10.35
2500	7.14	12.55
3150	7.32	14.14
4000	8.28	15.32
5000	8.33	15.83
<b>AVERAGE OF 250, 500, 1000, 2000 HZ</b>	<b>3.41</b>	<b>5.16</b>

All test were conducted by an accredited NVLAP Lab, Riverbank Acoustical Laboratories per ASTM C423 and ASTM E795 standards.

$NRC = \frac{\text{Absorption Area (Sabins)}}{\text{Sample Area (ft}^2\text{)}}$	$\text{Sample Area (ft}^2\text{) (Shade)} = \pi \times \left(\frac{D}{2}\right)^2$
Renata80 NRC = 0.65	Renata116 NRC = 0.50

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

## GRAPHS

