

Essential Cove



Direct Connect



Standard three selectable CCT 3000K, 3500K, 4000K



BZ



WH

FEATURES

- Low profile under cabinet LED – 2 3/4" x 1"
- Soft light premium diffuser for smooth even illumination
- 485 Lumens per foot (60LM/W)
- CCT selectable 3000K, 3500K, 4000K
- Line dimmable to 10%
- Several connector options

MOUNTING

- Quick installation via captive screws
- 3 rear knockouts available for line side input

ELECTRICAL/CONTROLS

- 120Vac, 50/60Hz input, Electronic 60V driver
- Linkable up to 300W
- 485 lumens per foot
- Protections: Short circuit, over current, over voltage, over temperature
- 120V dimmable (incandescent)
- Recommended, Lutron DV-600P (tested) or comparable

LISTING

- ETLus Listed to UL1598 and UL153 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0 and #9.0
- JA8, Title 24 certified (2019 standard)
- Energy Star certified

LED INFO

- 2835H LED: SDCM: 3-step MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L₇₀ > 50,000 hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			



ORDERING CODES

SERIES	WUND	essential cove
TYPE	WC1	wundercab
LENGTH	8 12 16 24 32	8-3/4" 12-3/8" 16-3/8" 24-3/8" 32-3/8"
CCT	3CCT	3000K (1.00) 3500K (1.01) 4000K (1.03)
CRI	90	90 CRI
FINISH	WH BZ	white bronze
VOLTAGE	120	120V
DIMMING	ELV	leading & trailing edge dimming (Triac/ELV)

ORDERING CODE


Follow the steps to specify your fixture, example:

WUN - WC1 - 16 - 3CCT - 90 - WH - 120 - ELV

LENGTH (INCH)	LUMENS (LM)	POWER (W)
8-3/4"	360	6
12-3/8"	485	8
16-3/8"	650	10
24-3/8"	980	14
32-3/8"	1350	18

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


PRODUCT DIMENSIONS

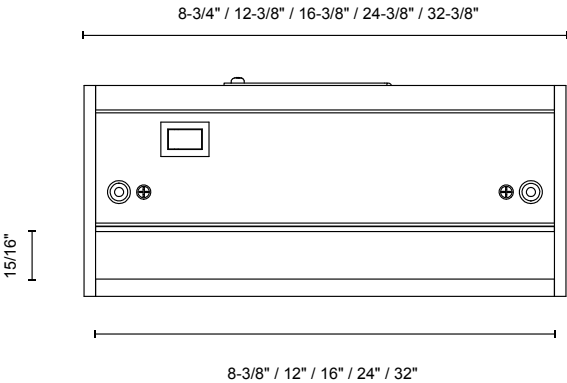

Available in 5 sizes:
8-3/4", 12-3/8", 16-3/8", 24-3/8", 32-3/8"

Knockout located at center of all lengths

Dimensions

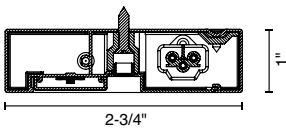

ACCESSORIES

Accessories

- SAB-WUN-FCON-6-BK

6" flexible connector, black
- SAB-WUN-FCON-12-BK

12" flexible connector, black
- SAB-WUN-FCON-24-BK

24" flexible connector, black
- SAB-WUN-FCON-72-BK

72" flexible connector, black
- SAB-WUN-FCON-6-WH

6" flexible connector, white
- SAB-WUN-FCON-12-WH

12" flexible connector, white
- SAB-WUN-FCON-24-WH

24" flexible connector, white
- SAB-WUN-FCON-72-WH

72" flexible connector, white
- SAB-WUN-PLUG-72-BK

72" plug-in feed, black
- SAB-WUN-PLUG-72-WH

72" plug-in feed, white
- SAB-WUN-HCORD-72-BK

72" power feed-hardwire, black
- SAB-WUN-HCORD-72-WH

72" power feed-hardwire, white



Flexible Connector
FCON 6 / 12 / 24 / 72



Plug-In Power Feed
PLUG



Power Feed
HCORD

NOTES

1. End-to-end connector and MC flex connector included with each fixture.



Connectors¹
End-to-end MC FLEX